
groove. The round side should face the side from which the machine is to be threaded.

- An easy method for recognizing tensions between the upper and the lower thread is to stitch diagonally across a square fabric folded on true bias and then stretch the cloth firmly between the fingers until one or both threads break. The broken thread is always with tighter tension. If the tensions are balanced, both the threads break together and need more force to break.
- Adjustments are made on the upper thread by turning the screw on the tension regulator with the presser foot down. For adjustments in the lower thread, the tension is regulated by turning the screw carefully on the bobbin case using the screw driver.
- For bottom threading, insert the bobbin into the bobbin case. The thread from the bobbin has to go be pulled through the slanting slot and a spring in the bobbin case. There should be a slight but noticeable tension and the bobbin should stay firm in its place. Extra thread about 5–7 cm long has to be left extending from the bobbin case. The slide plate should then be closed.
- For top threading the take-up lever has to be raised to its highest point and the thread is passed through thread guide to tension mechanism. The thread should then pass through the hole in the take-up lever from the side nearest to the tension disc. The remaining guide is then inserted into the needle from the side on which the last guide appears.
- For sewing, first the take-up lever has to be taken to its highest point by raising the presser foot and turning the fly wheel. The cloth is then placed under the presser foot with seam allowance to the right of the needle and the remaining cloth on the left. Now the wheel is turned until the needle enters the cloth at the exact starting point, and then the presser foot is lowered. The cloth can then be stitched by slowly starting the machine and guiding the cloth gently with both hands.



Who patented the Singer Sewing Machine?

The Singer Sewing Machine is Patented. Isaac Merritt Singer did not invent the sewing machine, but he patented the first practical and efficient one, on August 12th, 1851.

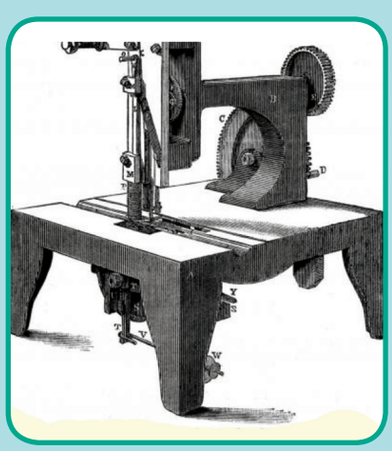

8.4 CARE OF THE MACHINE

All sewing machines should be taken proper care to ensure satisfactory sewing and long life of the machine. Regular cleaning by removing lint deposit, dust and thread bits should be done. The machine should be oiled periodically by applying machine oil to all oiling holes and joints where one part rubs against another.

TDD_Final_Chapter08.indd 77 21-02-2019 11.40.54 AM