6.4 FACTORS FOR SELECTING PATTERN MATERIALS:

The following factors are to be considered for selecting the pattern materials.


- Number casting to be produced
- Quality of the casting
- Size and shape of the casting
- The method of mould and casting
- Required surface finishing of casting
- Required accuracy of casting

6.5 TYPES OF PATTERNS

The following types of pattern are generally used in foundry.


- Single Piece Pattern
- Split Pattern
- Match Plate Pattern
- Loose Piece Pattern
- Sweep Pattern
- Skeleton Pattern
- Segmental Pattern
- Shell Pattern

Single Piece Pattern: The pattern made of single piece without joints is known as solid pattern. This pattern is used for making small casting with simple shape. Solid pattern can be easily removed from the moulding sand.

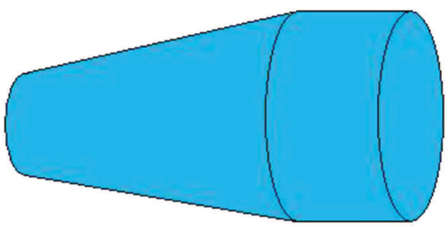

Single Piece Pattern


Split Pattern: Some patterns cannot be removed from the mould, if they are made

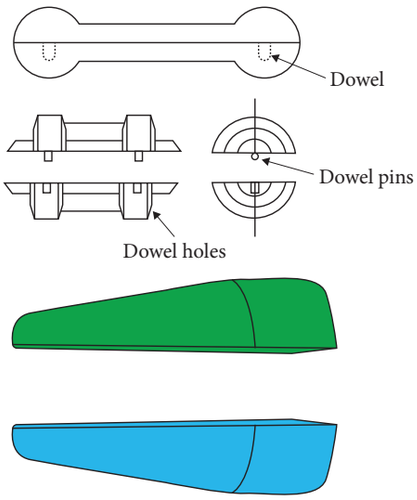

Split Pattern

in single piece. So, spilt patterns are used in that time. Split patterns are usually made of two parts. One part will make the lower half of the mould and the other part will make the upper half of the mould. These two parts are fixed correctly by dowel pins. Split pattern made in three or four parts are used for producing symmetrical casting such as cylinder, spindles, pipes, shaft etc.

Match Plate Pattern: This pattern has a match plate made of aluminium. split metal patterns are fitted on both sides of the match plate. one half of the pattern is fitted on one side of the match plate. The other half is fitted directly opposite on the other of the match plate.

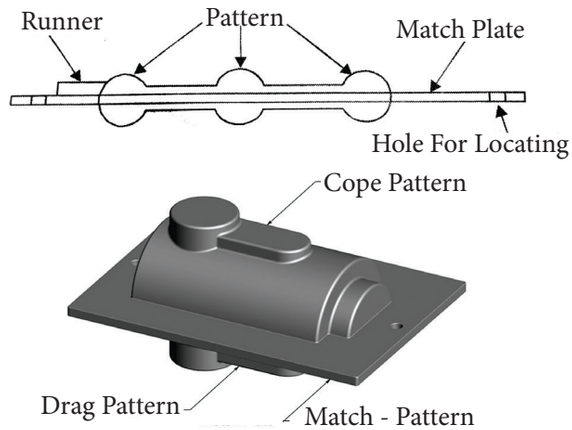

Match Plate Pattern

GM_Chp06.indd 75 14-02-2019 11:40:10