
Loose Piece Pattern: Some patterns cannot be removed from the mould as single piece. So loose piece patterns are used with the solid

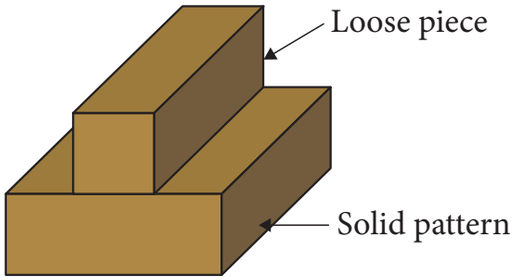

Loose Piece Pattern:

pattern for the easy removal. After moulding, the solid pattern is removed first, Then the loose pieces are removed without damaging the mould. This pattern is used for producing complicated casting of large size.

6.6 PATTERN MAKING ALLOWANCES


Patterns are made to correct size of the required casting. They are made slightly larger than the required casting. This extra dimension given to the pattern is called allowance. Pattern allowances are given to compensate the metal shrinkage, to avoid metal distortion, to withdraw the pattern easily from the mould.

- Shrinkage allowance
- Machining allowance
- Draft allowance
- Distortion allowance
- Rapping allowance

6.7 MOULDING TOOLS


The following moulding tools are used in the foundry.

Shovel: Shovel has a broad metal blade with long wooden handle. It is used for mixing and transferring the moulding sand into moulding box.

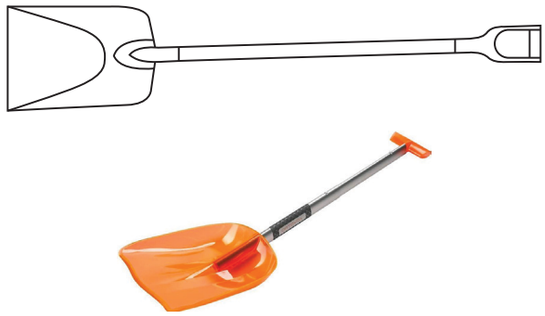


Shovel

Riddle: It has a circular square wooden frame with a wire mesh at the bottom. It is used to clean the mould sand by removing unwanted materials like nails, metal chips, stones, etc.

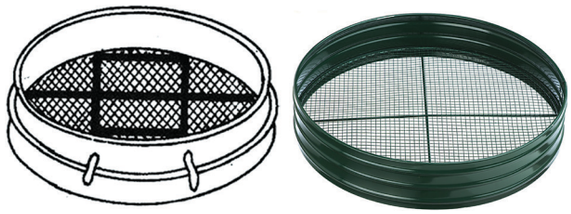

Riddle

Rammer: Rammer is used for packing or ramming the moulding sand in the moulding box. It is made of wood or cast iron. It has a butt end and a peen end. The butt end is in cylindrical shape and the peen end is in wedge shape.

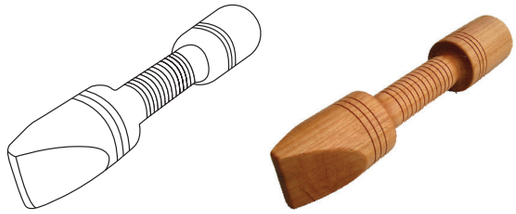

Rammer

GM_Chp06.indd 76 14-02-2019 11:40:10