*Ziecon Sand:* It is in cream color. It has high heat conductivity, good refractoriness and high density. It is used for making cores required for brass and bronze casting.


*Chromite Sand:* It has high heat conductivity and good refractoriness. It is used in chilled casting. It is also used as facing sand.

## 6.10 PROPERTIES OF MOULDING SAND:

A good moulding sand should have the following properties.

1. Porosity
2. Plasticity
3. Adhesiveness
4. Cohesiveness
5. Refractoriness
6. Collapsibility

## 6.11 GATING SYSTEM

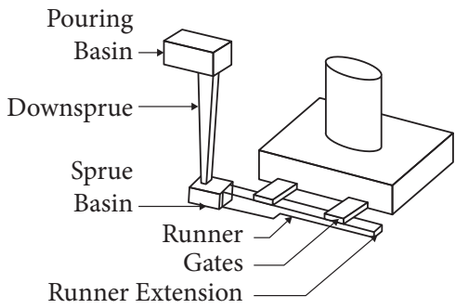


*Schematic diagram of a simple green sand mold together with the gatting system*

Gating system consists of pouring cup, sprue, runner, gate and riser.

***Pouring Cup:*** It is the funnel shaped portion on the top of the sprue note. Molten metal is poured easily through this cup.

***Sprue:*** It is the hole which connects the pouring cup to the runner. Molten metal passes through the sprue to the runner.

***Runner:*** Runner supplies molten metal from sprue to different gate.

***Gate:*** It connects the runner and the mould. Molten metal enters the mould through the gate

***Riser:*** It is a hole is the cope portion. After the mould is filling up, the molten metal rises into the riser. It supplies molten metal to the mould during shrinkage of casting and thus correct size casting can be obtained.

## 6.12 TYPES OF MOULDING:

The various types of moulding are follows:

1. Green Sand Moulding
2. Dry Sand Moulding
3. Loam Moulding
4. Bench Moulding
5. Floor Moulding
6. Pit Moulding
7. Sweep Moulding
8. Plate Moulding
9. Machine Moulding

SJGKZY



***floor moulding***

***Green Sand Moulding:*** The process of making mould by using green sand is called green sand moulding. After the mould is prepared, the molten metal is poured into the mould for producing casting.



GM_Chp06.indd 81 14-02-2019 11:40:13