


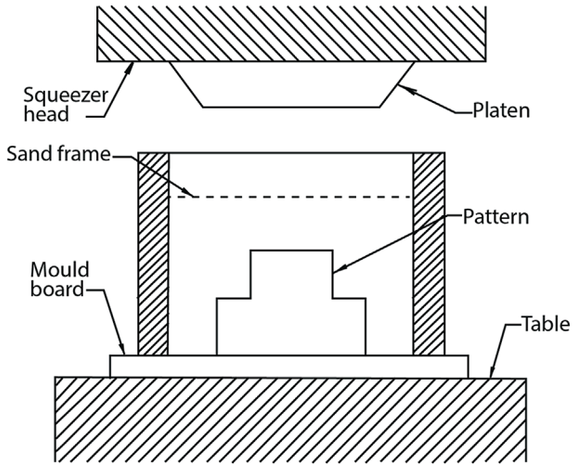

Top Squeezer Machine

Ramming the moulding sand, tilting the moulding box and removing the pattern from the mould are done by moudling machine. Generally, the following types of moulding machines are used.

1. Squeezer Machine
   a. Top Squeezer Machine
   b. Bottom Squeezer Machine
2. Jolt Machine
3. Sand Slinger

Squeezer Machine: In a squeezing machine, the sand in the moulding box is squeezed between the table squeezer machine.

Top Squeezer Machine: A moulding board and moulding box are placed on the table. The pattern is placed inside the moulding box. The sand frame is placed on the upper side of the box. Moulding sand is filled up in the box. The table is lifted up by using a table lifting mechanism. The plate in the squeezer head slightly presses the sand. The table comes to the starting position after the squeezing is over.

This machine is suitable for small moulds. In this method, the sand is rammed more densely on the top of the mould than around the pattern.

GLOSSARY

1. Pattern – மாதிரிவடிவம்
2. Mould – அச்சு
3. Casting – வார்ப்பு
4. Riddle – கம்பிவலை சல்லடை
5. Squeezing – அழுத்துதல்
6. Jolt – குலுக்குதல்
7. Slinger – வீசுதல்

GM_Chp06.indd 83 14-02-2019 11:40:14