
## Line Tester



### Uses

It consists of a glass tube filled with neon gas and electrodes at the ends. To limit the current within 300 micro- amps at the maximum voltages, a high value resistance is connected in series with one of the electrode. It may have tip like probe or like screw driver at one end. The presence of supply is indicated by the glow of the lamp. When the tip is touched on the live supply and the brass contact in the other end of neon tester is touched by hand, then completes the circuit and the neon bulb will glow.



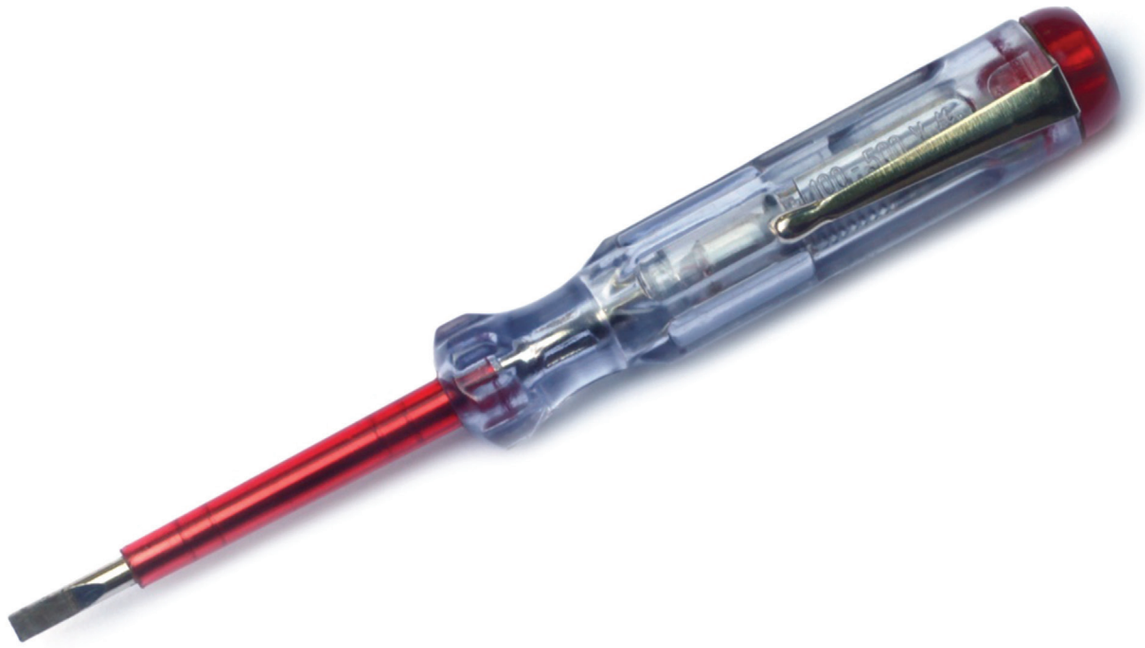

EMA_English_Practical.indd 181 11/9/2020 3:55:53 PM