
the most common method. The platform where stack is to be erected should be raised from the adjoining ground by at least 300 mm.

The stack is prepared by laying layers of sawn pieces in cross wise directions in alternate layers, length of the stack is equal to length of timber pieces. Width and height of the stack are restricted to about 1.5m and 3m respectively. A number of such stacks may be constructed under the same shed. Minimum distance between adjacent stacks should be kept about 600mm. This method of seasonings is also called "**Air seasoning**" as natural air remains circulating around each piece of the stacks and in due course of time seasoning is brought about.

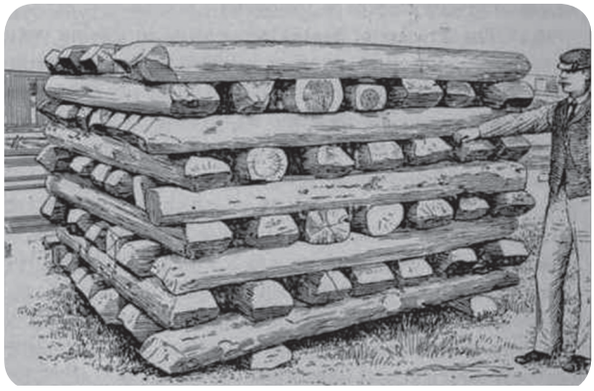


2. Artificial Seasoning

i) Boiling


ii) Electrical Seasoning

iii) Kiln Seasoning

(i) Boiling: In this method, timber is immersed in water and the water is boiled for about three to four hours. It is then dried very slowly. Instead of boiling in water, timber may be exposed to the action of hot steam. This method of seasoning proves to be costly.

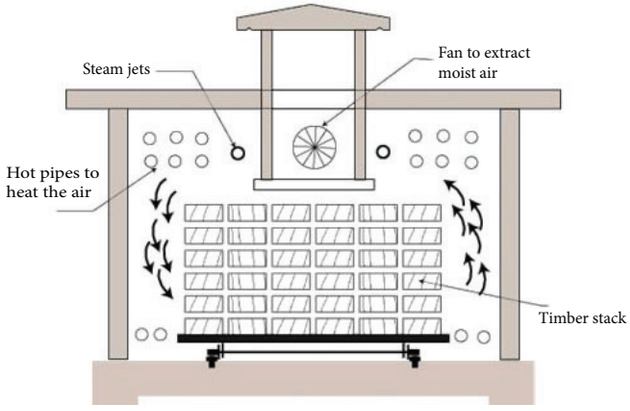

(ii) Electrical Seasoning: In this method high frequency alternating current is passed on timber. When timber is wet it offers less resistance to the flow of electric current. The resistance increases as the wood dries internally, which also results

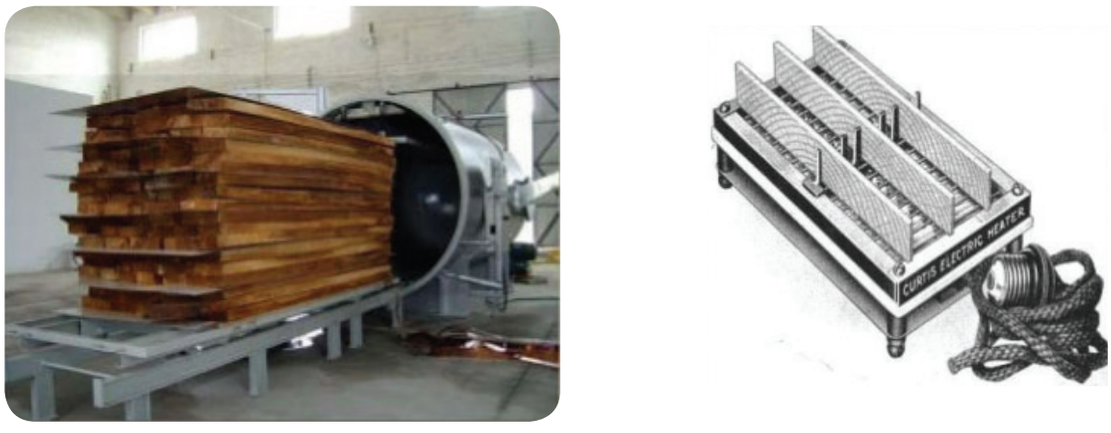

Electrical Seasoning

Civil_English_Unit_5.indd 110 12/21/2019 3:22:43 PM