5.1.5.2 Plywood

Plywood is made by pasting three or more veneers having the direction of grain running at right angles to each other in alternate layers. The adhesive coated sheets are assembled and pressed together by hot press. It is then cut into different pieces of marketable sizes. It is also available in various thickness ranging from 3mm to 25mm in Moisture Resistant (MR) and Boiling Water Resistant (BWR) grades.



5.1.5.3 Fibre Boards


For making fibre boards, wood chips are steamed to separate fibres from each other. These fibres are blended with resin and wax and turned into sheets by passing through a pressing machine under controlled heat and pressure. It is then cut into pieces of marketable sizes. These boards are available in thickness ranging from 2.3mm to 35mm in plain MDF boards and prelaminated MDF boards. (MDF = Medium Density Fibre board)



5.1.5.4 Particle Boards

Low Density Fibre (LDF) boards are called particle boards. These are manufactured from waste wooden chips, saw mill shavings or even saw dust blended with syntheic resin or other suitable binders by pressing.



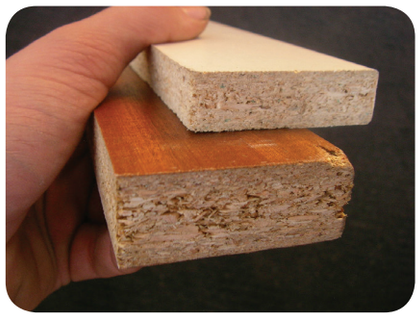

5.1.5.5 Hard Board

Hard boards are made from wood fibres extracted form wood chips and pulped wood waste. It is also called as High-density fibre (HDF) board. These boards are stronger, denser and harder than other types of boards because, it is made by the materials which are highly compressed. Usually hard boards are 3mm in thickness.



Civil_English_Unit_5.indd 112 12/21/2019 3:22:44 PM