2. Depth of foundation. It is designed by Rankine's formula

$$h = \frac{p}{\gamma}\left(\frac{1-\sin\phi}{1+\sin\phi}\right)^2$$

Where,

h = minimum depth of foundation


p = gross bearing capacity

γ = density of soil

ϕ = angle of repose or internal friction of soil.

6.1.4.2 Isolated Footing


These foundations are formed for individual concrete (or) brick pillar. The base structure is formed as stepped or slopped footing. Reinforced concrete foundations are used to provide foundation for heavy weight pillars.

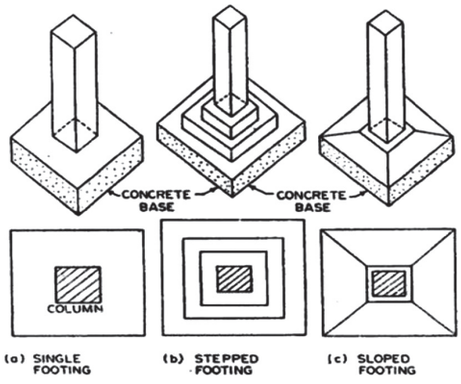



6.1.4.3 Combined Footing


A combined footing supports two or more columns in a row. The combined footing may be rectangular (or) trapezodal in shape. The centre of gravity of combined loads and the center of gravity of the footing should coincide.

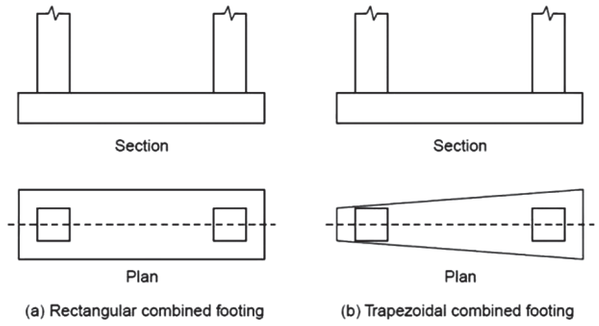



6.1.4.4. Continuous Footing

In this type of footing a single continuous RC slab is provided as foundation of two or more columns in a row. This type of footing is best where earthquake is liable to act. This footing prevents unequal settlement. Sometimes deeper beam is provided between the columns.

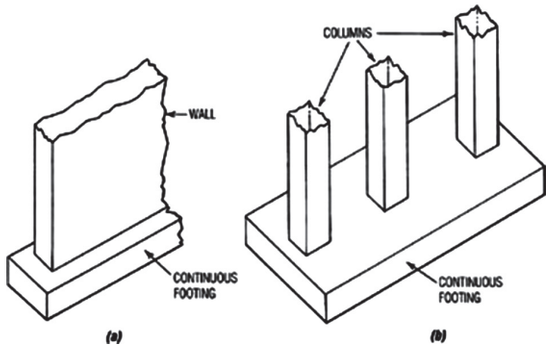

Civil_English_Unit_6.indd 128 12/21/2019 4:39:50 PM