
used in this masonry are dressed with chisel. The height of stones varies from 25cm to 30cm.

Types of Ashlar Masonry


I. Ashlar fine masonry.
ii. Ashlar rough tooled masonry.
iii. Ashlar rock masonry.
iv. Ashlar chamfered masonry.
v. Ashlar block in course masonry.

Ashlar Fine Masonry

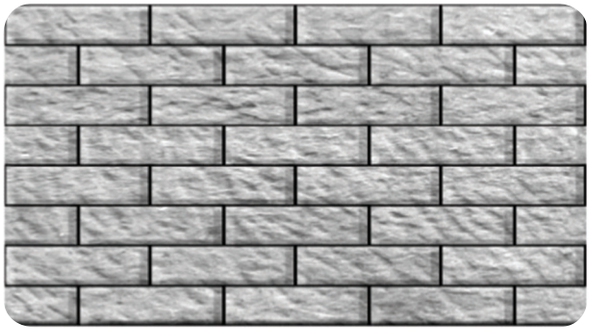

In this type of masonry, the beds, sides and faces are finely chisel dressed. The stones are arranged in proper bond and the thickness of the mortar joints does not exceed 3mm. This type of construction gives perfectly smooth appearance. It is costly in construction.

Ashlar Rough Tooled Masonry

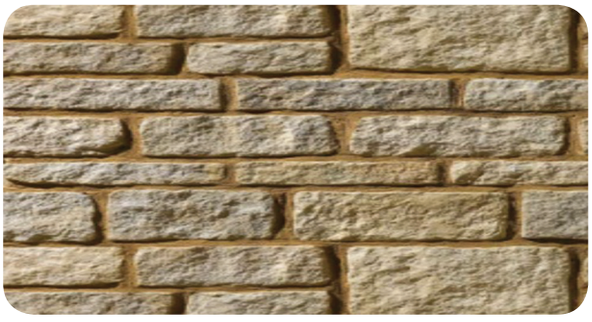


In this type of ashlar masonry, the beds and sides are chisel dressed. But the face is made rough by means of tools. The thickness of mortar joints does not exceed 6mm. This type of work is also known as bastard ashlar.

Ashlar Rock Masonry

In this type of ashlar masonry, a strip about 25mm wide is made by means of a chisel, is provided around the perimeter of the exposed face of every stone. But the remaining portion of the face is left in the same form as received from quarry. The projections on the exposed face known as the bushings exceeding 80mm in height are removed by a hammer. This type of construction gives massive appearance.



Ashlar Chamfered





In this type, 2.5cm chisel drafting around the face is made at an angle of 45˚ with the help of chisel. Another chisel drafting about 10mm to 12 mm wide is again made around the perimeter inside the chamfered drafting. The remaining

Civil_English_Unit_6.indd 142 12/21/2019 4:39:52 PM