



Couple Roof

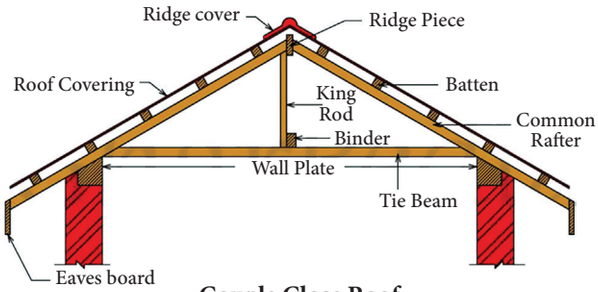

Couple Close Roof

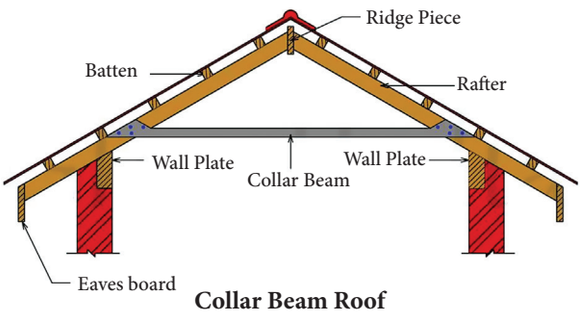

Collar Beam Roof

Trussed Roof


These types of roofs are constructed in triangular shape and made up of steel or timber. These are used when the span exceeds 5.5m. The spacing of trusses depends upon the load on the roof.

The following are some of important types of trussed roof

i. King post truss
ii. Queen post truss
iii. Steel truss

I. King Post Truss


This is used for spans from 5m to 9m. In king post truss, the common rafters are supported by wooden frame work called truss at required intervals. The frame work consists of two principal rafters, a tie beam, two struts and a king post. Purlins are placed longitudinally over the principal rafters to support the common rafters. The spacing of the king post truss is generally adopted as 3m

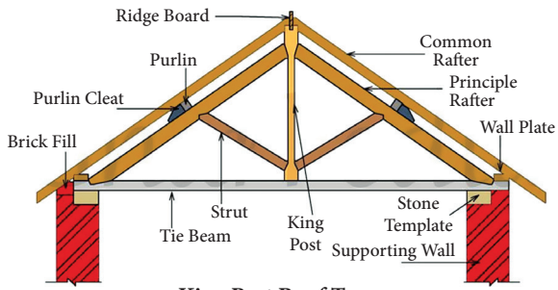

King Post Roof Truss

ii. Queen Post Truss

This is used for spans from 9m to 14m. In queen post truss the frame work consists of two principal rafters, two queen posts, two struts, one straining beam, one straining sill and a tie beam. Common rafters are placed over the purlins which are placed over the principle rafters.

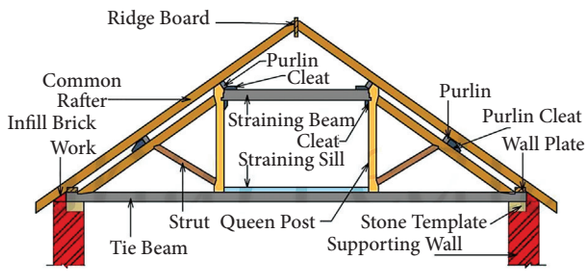

Queen Post Truss

iii. Steel Roof Truss

For spans greater than 12m, steel trusses are economical. Mild steel rolled sections of standard shapes and sizes are available in the market. It facilitates the construction of steel trusses. For small spans, the steel roof trusses are made using angles connected by rivets or welds.

Civil_English_Unit_8.indd 183 12/21/2019 5:25:15 PM