iii) Weathering Course


The weathering course will protect the surface of the roof slab from weathering actions. The surkhi mortar 1:1.5 (1 lime and 1.5 brick bats) ratio is laid on the roof surface for about 100mm thick. Above this, flat tiles are laid by using cement mortar 1:3. The joints in between the tiles are pointed by using cement mortar. Proper slope is maintained for easy drainage of rain water.





2. Madras Terrace Roof

1. Madras terrace roof was widely used in Madras Province in olden days.
2. It consists of teak wood beams placed over the steel girders with a furring piece between them. The furring piece gives necessary slope to the flat roof.
3. A course of well burnt bricks is laid in lime mortar by keeping the bricks on their edges diagonally across the beams.
4. A 10cm thick brick bat concrete is laid over it and thoroughly compacted by frequent wetting with water.
5. Flat tiles are laid in 3 layers over this using lime mortar.
6. Finally three coats of plaster are applied for finishing the surface and a slope of about 1 in 30 is given for draining of rain water.

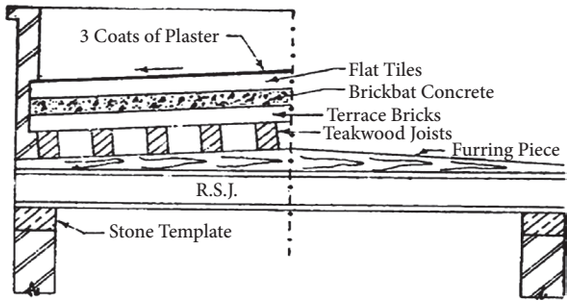





ACTIVITY 4

Visit a construction site near your school and prepare a detailed report about the stages of construction of RCC roof slab with photos.

Civil_English_Unit_8.indd 185 12/21/2019 5:25:17 PM