
B) Table Moulding :

Process of moulding these bricks is just similar to ground moulded bricks.These are moulded on a table of size about 2m × 1 m. The clay, mould, water pots, stock board, strikes and pallet boards are placed on the table. The bricks are moulded on the table and sent for the further process of drying.



However the efficiency of moulder decreases gradually because of standing at the same place for long duration. The cost of brick moulding also increases when table moulding is adopted.

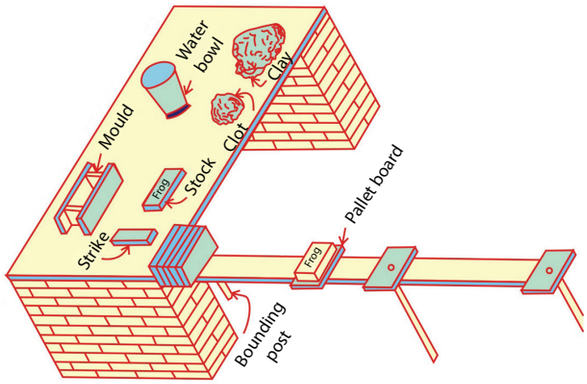

2) Machine Moulding :

This method proves to be economical when bricks in huge quantity are to be manufactured at the same spot. It is also helpful for moulding hard and string clay. These machine are broadly classified into two categories

a) Plastic Clay Machine.

b) Dry Clay Machine.

a) Plastic Clay Machine :

This machine containing rectangular opening of size equal to thickness and width of a brick. Pugged clay is placed in the machine and as it comes out through the opening, it is cut into strip of standard length by wires. So these bricks are called **"Wire cut bricks"**.



b.) Dry Clay Machines :

In these machines, strong clay is first converted into powder form and then water is added to form a stiff plastic paste. Such paste is placed in mould and pressed by machine to form hard and well shaped bricks. These bricks are heavier than ordinary hand moulded bricks. They carry distinct frog and exhibit uniform texture.

3.2.5.3. Drying

The damp brick, if burnt, are likely to be cracked and distorted. Hence, moulded bricks are dried before they are taken for the next operation of burning.

Civil_English_Unit_3.indd 68 12/21/2019 2:26:06 PM