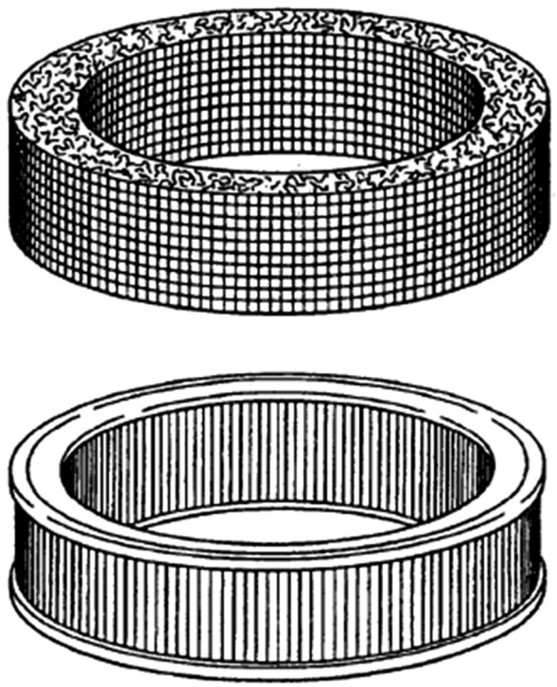


Figure 6.4.1 Dry Type Air Cleaner

to the upper section of the carburettor through the filter outlet in the intake air path and enters into the carburettor. In this type of filters, a number of folded paper elements are used as a filter. Figure 6.4.1 shows the Dry Type Air Cleaner.

6.4.2 Oil Bath Type Air Cleaner

In oil bath type, the air filter is filled with oil in the container such as a tank. This type of filter is made up of copper metal and looks like a spider net in ring shape. It is enclosed in the middle of the tank filled with oil and the upper cover kept in closed position. Due to the reciprocating downward movement of piston the air is sucked in to the engine through the intake manifold where the air filter is fixed. The air is initially passed through the oil present in the filter tank, where surface of the oil absorbs larger size dust particles in it. After that the smaller size dust particles in the air are removed

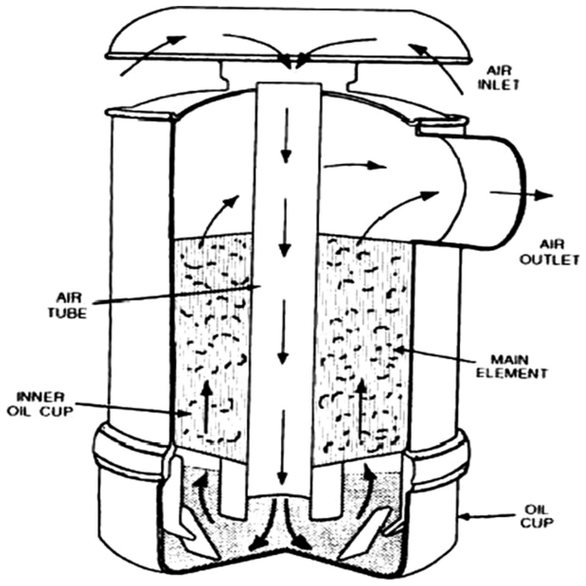


Figure 6.4.2 Oil Bath Type Air Cleaner

by the filter. The filtration components and oil container are fitted separately in this type of filters. Figure 6.4.2 shows the Oil Bath Type Air Cleaner.

6.4.3 Oil Wetted Type Air Cleaner

In this type of filter, the filter is not dipped in the oil in the tank. Instead, the surface of the filter will be coated with oil. The air passing through the filter initially touches the oil on the filter and removes larger size dust particles and impurities. After that the air is passed into the net shaped filter and the air gets purified again and the cleaned air is sent to the engine. Generally, in automobiles after running for 8000 kilometers the filter is

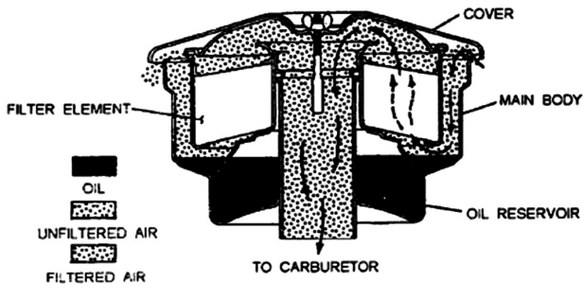


Figure 6.4.3 Oil Wetted Type Air Cleaner

AM_Unit_06.indd 119 31-01-2019 17:49:22