Figure 6.7 shows the Dual Intake Manifold and Four-barrel intake manifold

6.8 CARBURETTORS

Carburettor is a device which is used to atomize the petrol and mix it with the air in the proportion depending upon the speed and torque of the engine. This mixture enters into the engine via inlet manifold with the help of carburettor. The venture in the carburettor is used to mix the fuel with the air to the required proportion. After mixing the air fuel mixture is introduced into the engine cylinder. Figure 6.8 shows the Carburettors

The carburettor is classified into several categories. They are as follows,

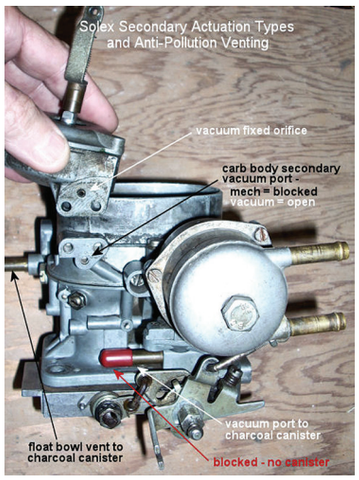


Figure 6.8 Carburattors

1. According to the float chamber
   a) Eccentric
   b) Concentric
2. According to the path of air flow
   a) Down Draft
   b) Side Draft

SPARK PLUG

Albert Champion



During the early 1900s, France was the dominant manufacturer of spark plugs.

Frenchman, Albert Champion was a bicycle and motorcycle racer who immigrated to the United States in 1889 to race. As a sideline, Champion manufactured and sold spark plugs to support himself.

In 1904, Champion moved to Flint, Michigan where he started the Champion Ignition Company for the manufacturing of spark plugs.

He later lost control of his company and in 1908 started the AC Spark Plug Company with backing from Buick Motor Co. AC presumably stood for Albert Champion.

His AC spark plugs were used in aviation, notably for the trans-Atlantic flights of Charles LIndbergh and Amelia Earhart. They also were used in the Apollo rocket stages.



AM_Unit_06.indd 123 31-01-2019 17:49:22