and Pre-combustion chamber engines. Figure 6.10.3(a) shows the Pintle Nozzle.

b) Pintaux Nozzle:

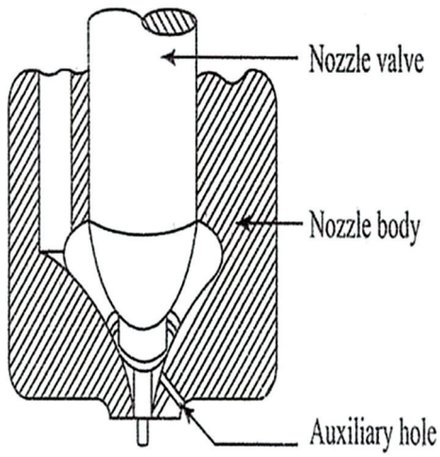


Figure 6.10.3(b) Pintaux Nozzle

This type of nozzle is advancement in the pintle nozzle type. This type of nozzle has the tip projected outside and has a hole in the centre for injecting the fuel. This type of nozzle can achieve combustion even in cold starting condition of engine. Figure 6.10.3(b) shows the Pintaux Nozzle

c) Delay Nozzle:

It is the further advancement in pintle type nozzle in which the fuel injection and the amount of fuel injected into the combustion chamber are controlled depending on engine speed. This type of nozzle is called as delay nozzle.

6.11 COMBUSTION CHAMBERS

The combustion chamber is the place where the air fuel mixture is burnt. It is the space covered by the cylinder head, cylinder wall and piston top. Above the piston there are inlet and exhaust valves and a spark plug present in the cylinder head. Depending on the position of the valves, spark plug and the combustion chamber the engines can be classified as

- L – Head engine
- I – Head engine
- F – Head engine
- T – Head engine
- Spherical shape

L – Head Engine

This type of engine is used for slow and high speed applications. In this type of engines the inlet and exhaust valves are placed in the cylinder block itself and the valves open the intake and exhaust ports by moving upward motion. The spark plug is fitted at the top of the engine cylinder head. Figure 6.11(a) shows the 'L' Head Engine.

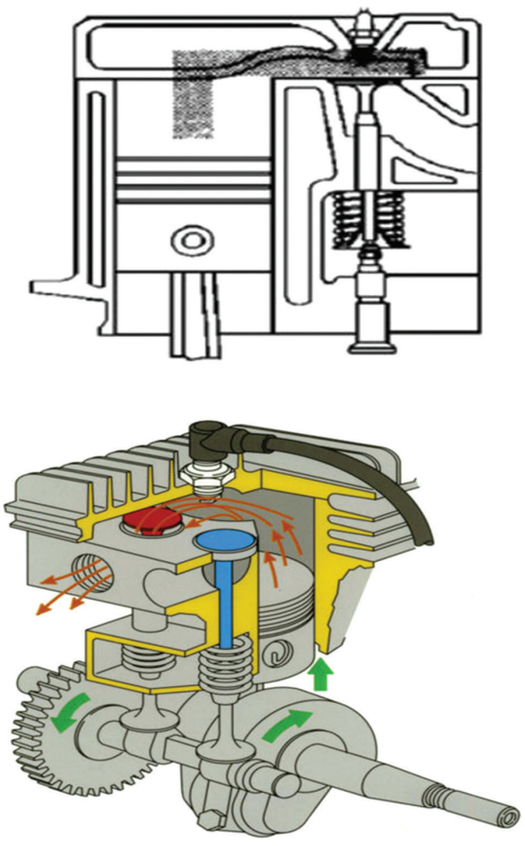


Figure 6.11(a) L – Head Engine

AM_Unit_06.indd 127 31-01-2019 17:49:23