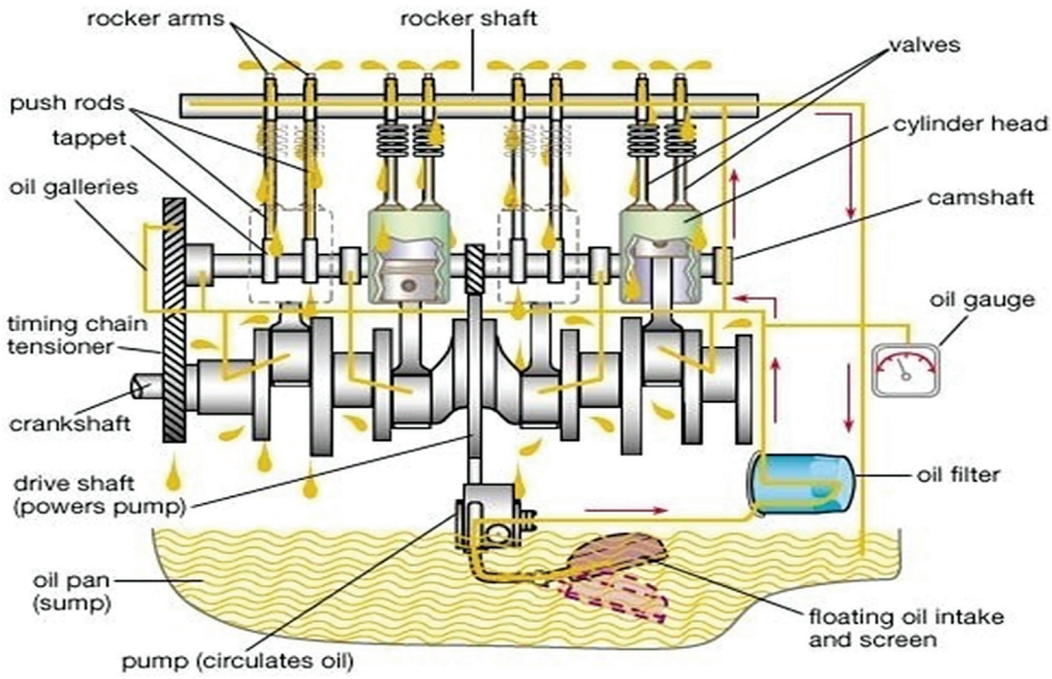


Figure 8.4.3 Pressure Lubrication System

rod. To lubricate the cam shaft and training gear from the gallery, the oil is sent to the rocker arm from oil holder and overhead valve by valve mechanism. In this system the oil pressure can be known and most of the engines use this type of system. See Figure shown 8.4.3 Pressure Lubrication System.

8.4.4 Semi-Pressure Lubrication System

It is the combination of splash and pressure lubrication system. This lubrication system is used in four stroke engines.

8.5 PARTS OF LUBRICATION SYSTEM

8.5.1 Oil Filters

This is used to filter the lubricating oil coming out from the oil pump which contains impurities and dust. The filters used in automobiles are, see fig shown in 8.5.1 Oil Filter.

1. Cartridge filters.
2. Edge filters.
3. Centrifugal filters.

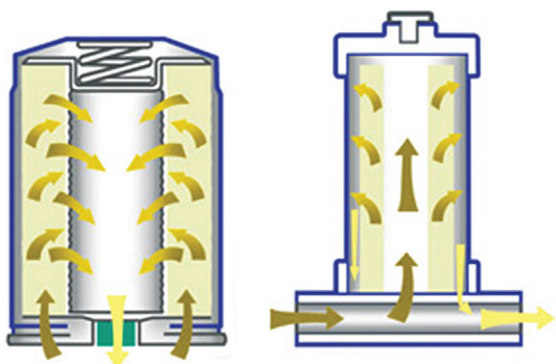


Figure 8.5.1 Oil Filter

8.5.1.1 Catridge Filters

It is used in almost all automobiles. This filter cleans very minute dust particles in the oil up to 5 microns. The oil is passed through the filter and taken out

AM_Unit_08.indd 164 12/20/2019 5:32:49 PM