at the outlet by which the dust particles of more than 5 microns are removed. This type of filter uses cloth or fibre material. There is a need for replacement of cloth or the filter material from time to time. See fig shows in 8.5.1(a) Catridge Filters.

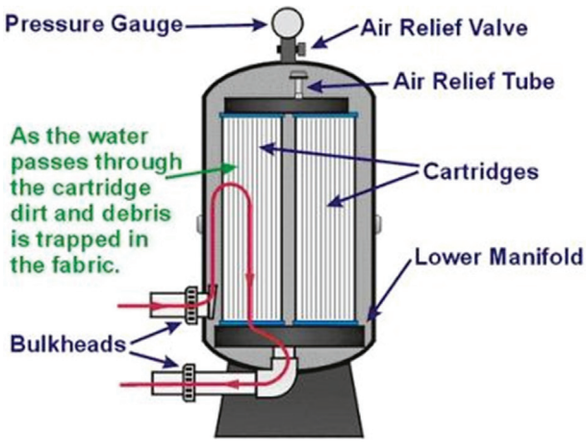


Figure 8.5.1(a) Cartridge Oil Filter

8.5.1.2 Edge Type Oil Filters

This filter contains a soft disc made up of brass material. This filter is divided into two parts. One part is attached to the spindle which is at the centre of the filter and the other part is supported by the square rod at the edge of the filter. The gap in between the disc is in few microns. When the oil flows through the each disc, the dirt gets deposited on the upper surface of the discs and then it passes out through the outlet. During this, the dirt in the spindle and square rod gets deposited at the bottom of filter body. See fig shows in 8.5.1(b) Edge Type Oil Filters.

8.5.1.3 Centrifugal Type Oil Filters

In this type of filter, the impure oil coming from the oil pump reaches the hollow spindle at the centre of a rotor. The hollow sphere is surrounded by the pillars. The oil coming from the pillars fills the rotor and then goes through the tube of the rotor and comes out via jet at the base of the tube. Because of this, the rotor casting rotates in the opposite direction. During the rotation of the rotor

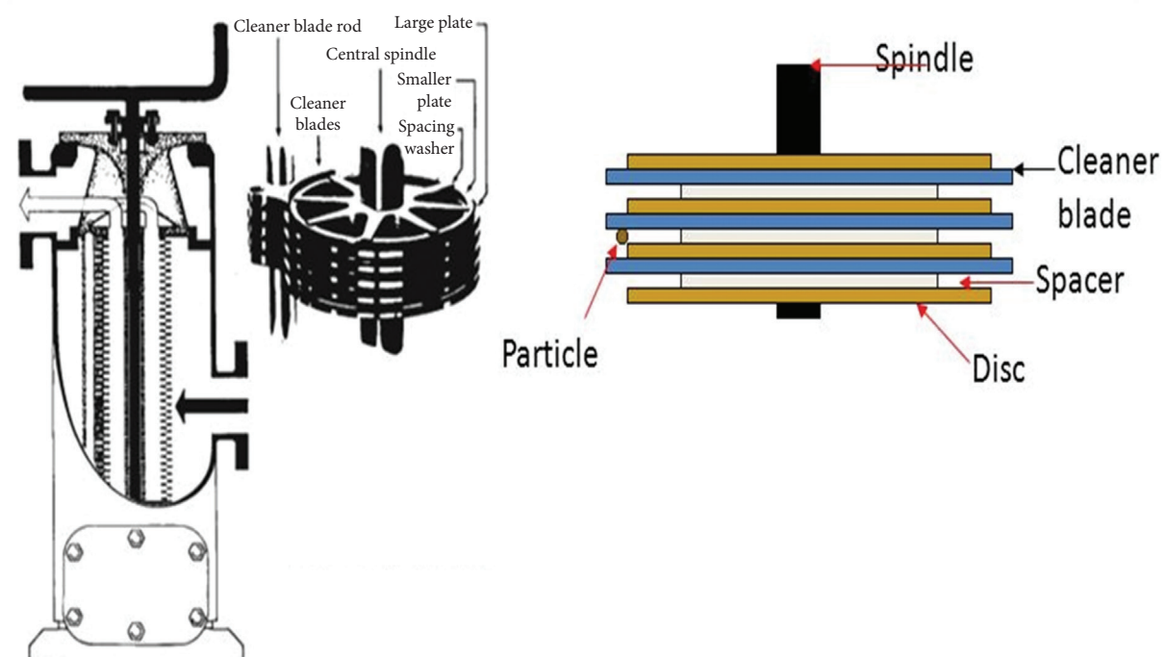


Figure 8.5.1(b) Edge Type Oil Filters

AM_Unit_08.indd 165 12/20/2019 5:32:50 PM