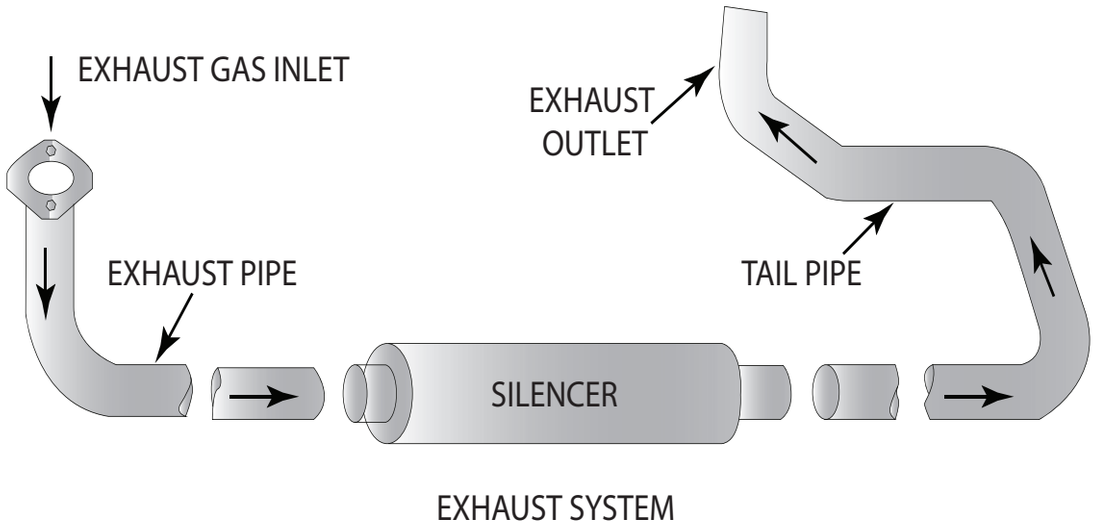


Fig 1. Silencer

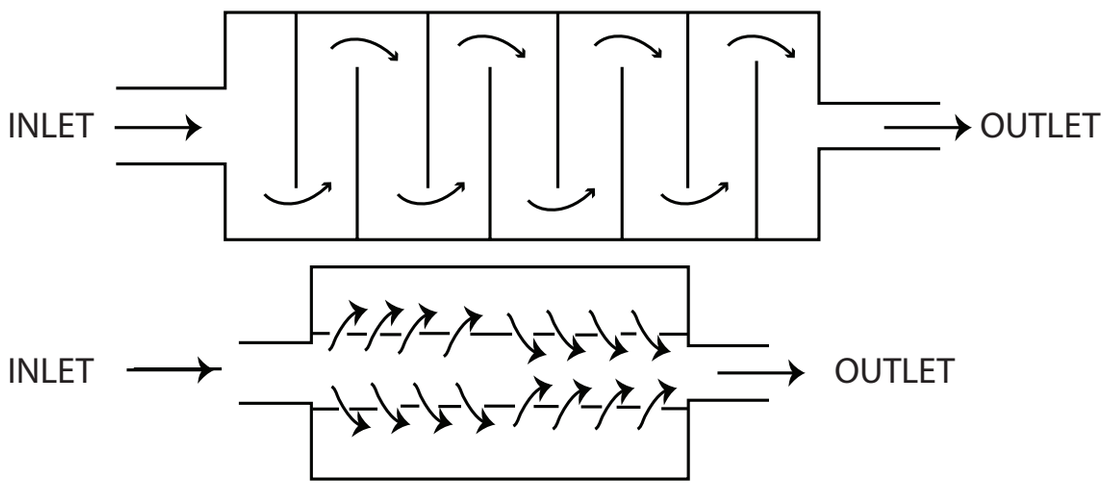


Fig 2. Silencer

Dismantling

1. Remove the Mounting bolts and clamps of the silencer.
2. Remove the Bolts from Exhaust manifold and keep separately.
3. Remove the Exhaust pipe and silencer and keep separately.
4. Using wooden mallet, hammer the sides and up and down of the silencer to remove the carbon particles which disturbs the flow.
5. Heat the Silencer well and allow it to cool for some time. Then, hammer it by mallet, move the iron rod inside the silencer to remove carbon particles.
6. Use Rod or wire brush to remove carbon particles

AM_English_Practicals.indd 260 12/20/2019 5:50:03 PM