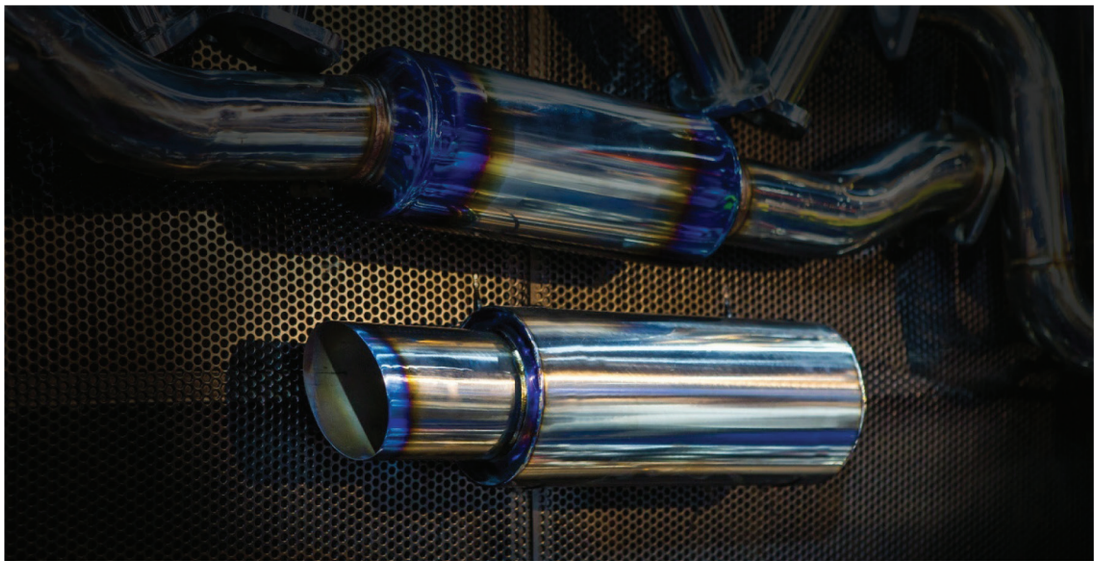


Fig 3. Silencer - Corediagram

Note

If the silencer is attached with the catalytic convertor, then service the same after knowing the type of convertor and its properties.

If the settling of carbon particles are high, then cut the silencer by Hack saw blade and welded again after servicing.

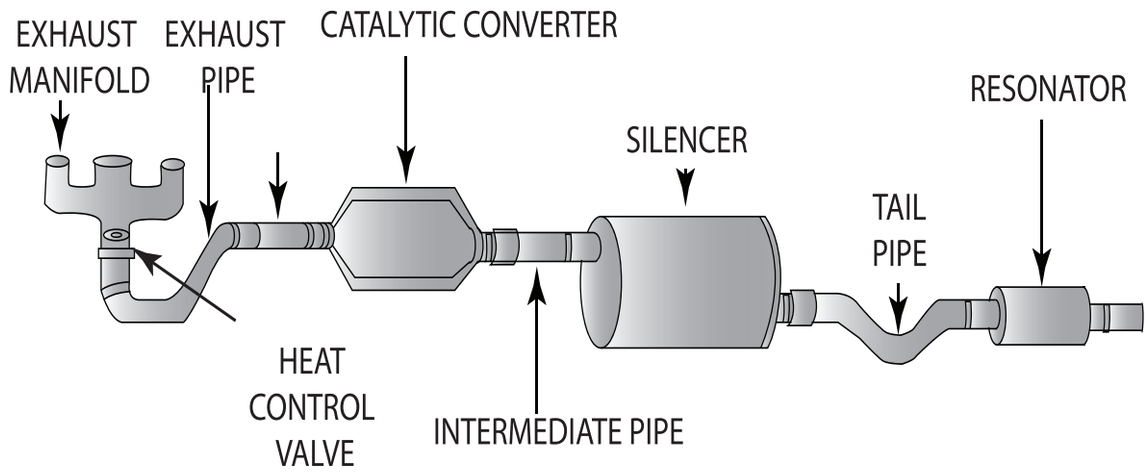


Fig 4. Catalytic Convertor type Exhaust System

Re-assembling

1. Silencer is assembled in the reverse process of dismantling the parts.
2. Silencer is fixed with new or serviced washer.

Conclusion

Silencer from the given Vehicle is serviced in the correct method and fixed.

AM_English_Practicals.indd 261 12/20/2019 5:50:03 PM