loosen and tighten the four and six flat head bolt and nuts. It is made up of with Chromium, Vanadium and Alloy Steel metals. In all the spanners their sizes are mentioned in terms of mm or inch. Open Ended Spanners are shown in Figure 2.1.1.1(a).

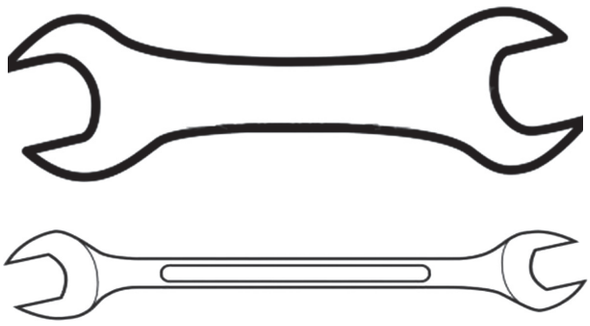


Figure 2.1.1.1(a) Open Ended Spanner

Sizes of Spanner

- 6-7 mm
- 8-9 mm
- 10-11 mm
- 12-13 mm
- 14-15 mm
- 16-17 mm
- 18-19 mm
- 20-22 mm
- 21-23 mm
- 24-27 mm
- 25-28 mm
- 27-32 mm

b) Ring Spanner

This type of spanner has ring shape on both the ends or at one end, with the ring portion is subdivided into 12 flat. It is used to loosen and tighten the four flat and six flat bolts. It is used in crucial and critical places where the other spanners are not able to loosen and tighten the bolts and nuts. Shown in Figure 2.1.1.1(b).






Figure 2.1.1.1(b) Ring Spanner

c) Box Spanner

It consists of with two portions namely head (Box or Socket) and handle. Different combination of socket and handles might be used for different purpose. Small Handle, T Handle, Long Handle, and 'U' Joint Reversible Ratchet are the handles which are commonly used. Shown in Figure 2.1.1.1(c)

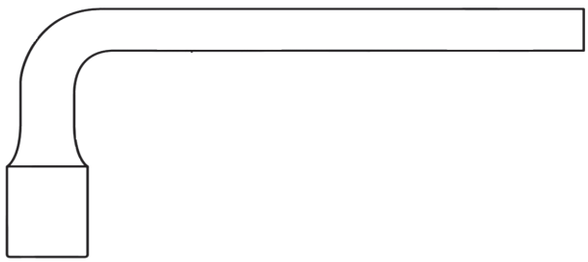


Figure 2.1.1.1(c) Box Spanner

d) Adjustable Wrench and Pipe Wrench

This is an arrangement in which the holding edge can be varied. There will be a fixed jaw and a moving jaw. By rotating knurled nut the moving jaw can be moved to the desired extent. An adjustable wrench can be used in rotating the bolt and nut. It is made up of high carbon steel. The pipe wrench is used for tubular cross section. Shown in Figure 2.1.1.1(d)

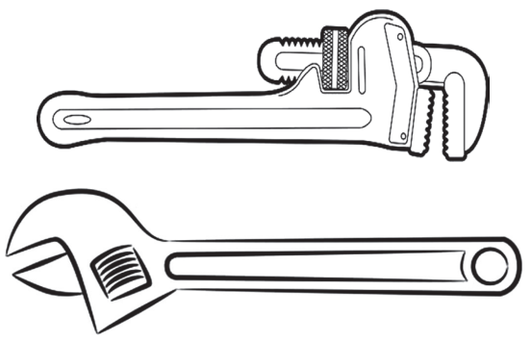


Figure 2.1.1.1(d) Adjustable Wrench and Pipe Wrench

AM_Unit_02.indd 22 12/20/2019 4:25:24 PM