j) Pressure Gauge

It is used to measure air pressure and pressure of lubricating oil in the engine cylinder. It is set on the vehicle's dashboard. Fig 2.3.1(j) shows Pressure Gauge.



Figure 2.3.1(j) Pressure Gauge

k) Speedometer

It helps to calculate the speed of the vehicles. This calculation helps the driver to increase or decrease the driving speed of the vehicle based on the situation. Figure 2.3.1(k) shows Speedometer.

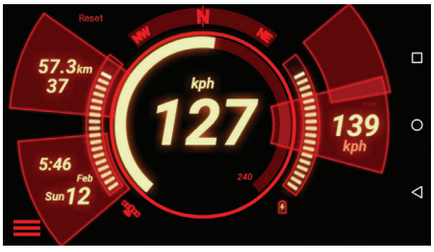


Figure 2.3.1(k) Speedometer

l) Odometer

This helps to show, how much the vehicle has been running. (Eg., 15000 km). Fig 2.3.1(l) shows Odometer.



Figure 2.3.1(l) Odometer

2.3.2 INDIRECT TOOLS

a) Feeler Gauge
b) Outside Caliper
c) Inside Caliper

a) Feeler Gauge

The set of thin steel plates which are used to measure the size of the shortest spacing is called the feeler gauge. These are placed in a heat treated shell in order to separate them easily. It is very useful for measuring gaps in valve tape bed, sparkplug cape. Fig 2.3.2(a) shows Feeler Gauge.

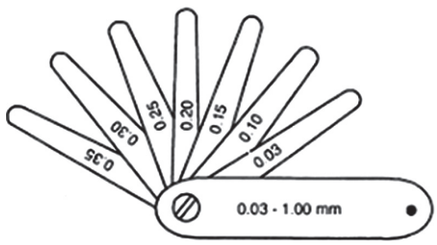


Figure 2.3.2(a) Feeler Gauge

b) Outside Caliper and Inside Caliper

This setting can be found in the picture. It is used to measure the outer diameters of the pipe and the engine cylinder. This can measure the external diameter very accurately.

Inside calliper is used to measure the inner diameter of the engine cylinder holes, pipes and the inner dimensions of the canal. It is an indirect measuring instrument. Fig 2.3.2(b) shows Outside and Inside Calipers.

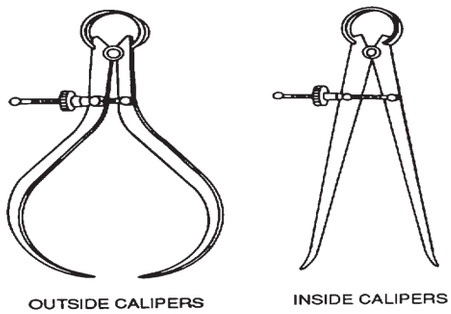


Figure 2.3.2 (b) Outside and Inside Calipers

AM_Unit_02.indd 39 12/20/2019 4:25:28 PM