the heavyweight objects from one place to another place. Components with low load can be lifted easily in hand. But it is not possible to repair the tire of the heavy load carrying capacity vehicle by lifting the vehicle in hand. For this hydraulic jack is used. It works on the hydraulic pressure. Based on this principle, some vehicles are used (eg. JCP, Crane, Bull Dozer). The hydraulic jack is used to lift the vehicle while water washes the vehicle. Hydraulic jack working is explained in the schematic diagram. Fig 2.3.8(b) shows the diagram of Hydraulic Jack.



Figure 2.3.8(b) Hydraulic Jack

2.3.8(c) Hydraulic Press

It is used to straightening the bent portion in the flat, round and tube components. It works on the principle of Pascal's law. It used in automation industries, for repairing the misaligned curved portion in the chassis, steering, and in-vehicle fork. It is used to fix the bearings which have been used on the automatic machines. Fig 2.3.8(c) shows Hydraulic Press.

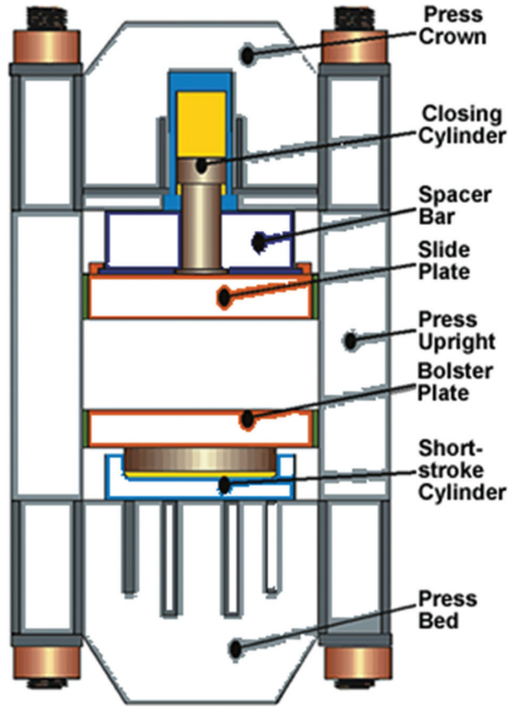


Figure 2.3.8(c) Hydraulic Press

2.3.8(d) Hydraulic jack puller

This equipment is used in the automation industries for to remove the closely fitted bearing by without having any damage in the bearing. Figure 2.3.8(d) shows the diagram of Hydraulic Jack Puller.

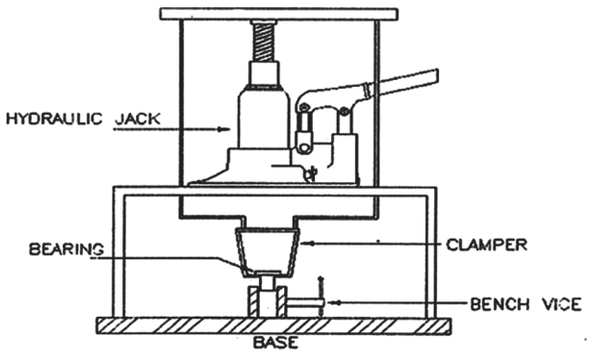


Figure 2.3.8(d) Hydraulic Jack Puller

AM_Unit_02.indd 49 12/20/2019 4:25:30 PM