




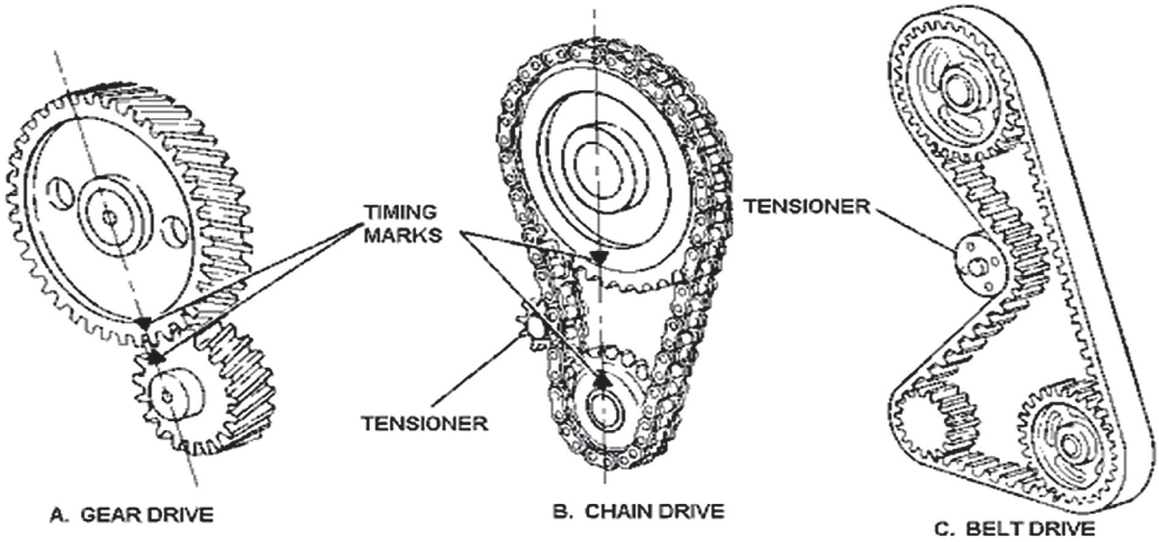

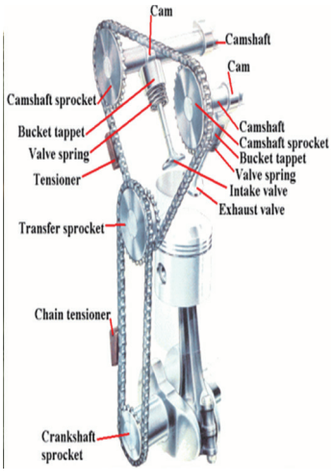

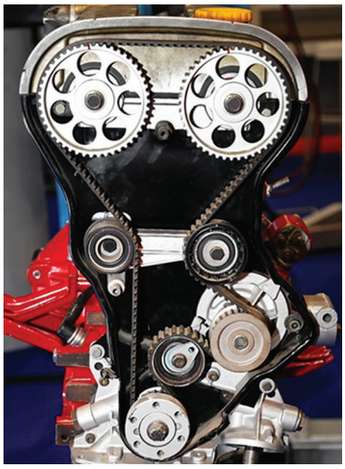

A. Gear Drive **B. Chain Drive** **C. Belt Drive**

Fig 5.3.11(a, b, c) Timing Gear with Various Drive

teeth in camshaft is always twice the number of teeth in crankshaft. Hence, camshaft will always rotate at half the speed of the crankshaft. Timing mark will be marked in the timing gear. This corresponds to first cylinder TDC position. The marks are properly aligned at the time of engine assembly during manufacturing. This will operate the valve at proper time. If the distance between the crankshaft and camshaft is more, then they are connected by timing chain or by timing belt. Timing Gear with Various Drive shown in Figure 5.3.11(a, b, c)

5.3.12 Cam shaft

For obtaining power from the engine, the processes such as valve opening and closing, supplying the air fuel mixture at the appropriate timings and producing spark in the spark plug in order to ignite the air fuel mixture should be done correctly. For performing this type of operation a component called as cam shaft is used., The cams in the cam shaft are designed in such a way to rotate for opening and closing the valves by the cam shaft according to the valve timing and firing order of the engine. In addition to this, eccentric arrangement in the

AM_Unit_05.indd 92 12/20/2019 5:26:35 PM