


► **ANTI-ROTATION PAWL**
The breech plugs contain firing pins; each pin has a small cam head to catch hold of the gun body.



◀ **MAGAZINE SLOT**
The 40-round magazine was constructed with a groove to help prevent the gun jamming.

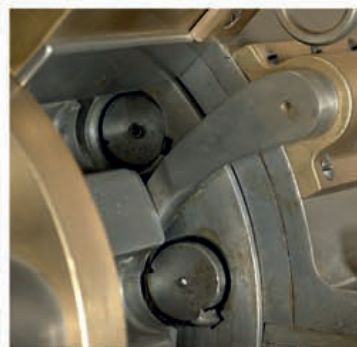

► **LOWERING GEAR**
This wheel was used to raise and lower the barrels of the gun.



► **WHEEL HUB**
To make transportation easier, a towing ring was secured to the wheel hub by a cotter (a wedge-shaped fastener).



► **TRAVERSING HANDSPIKE STOWAGE**
Stored on the side of the gun, the handspike was used for additional grip when manoeuvring the gun carriage.

