

FUSELAGE AND WINGS**▲ ANGULAR WINDOWS**

The windows had a thin gold coating to absorb radar energy into the airframe. Dogtooth patterns along window and canopy edges, and on other openings and panels, helped to disrupt radar reflections.

**◀ PARACHUTE**

The wings possessed elevons but no flaps, so the landing speed was quite high. A brake-chute was used to reduce the length of the landing run.

◀ FORWARD VIEW FROM TAIL

At night, a rear-facing floodlight on top of the canopy illuminated the in-flight refuelling port (the central panel just below the light). Brake-chute doors were located at the base of the ruddervators.

**▲ FRONT WHEEL**

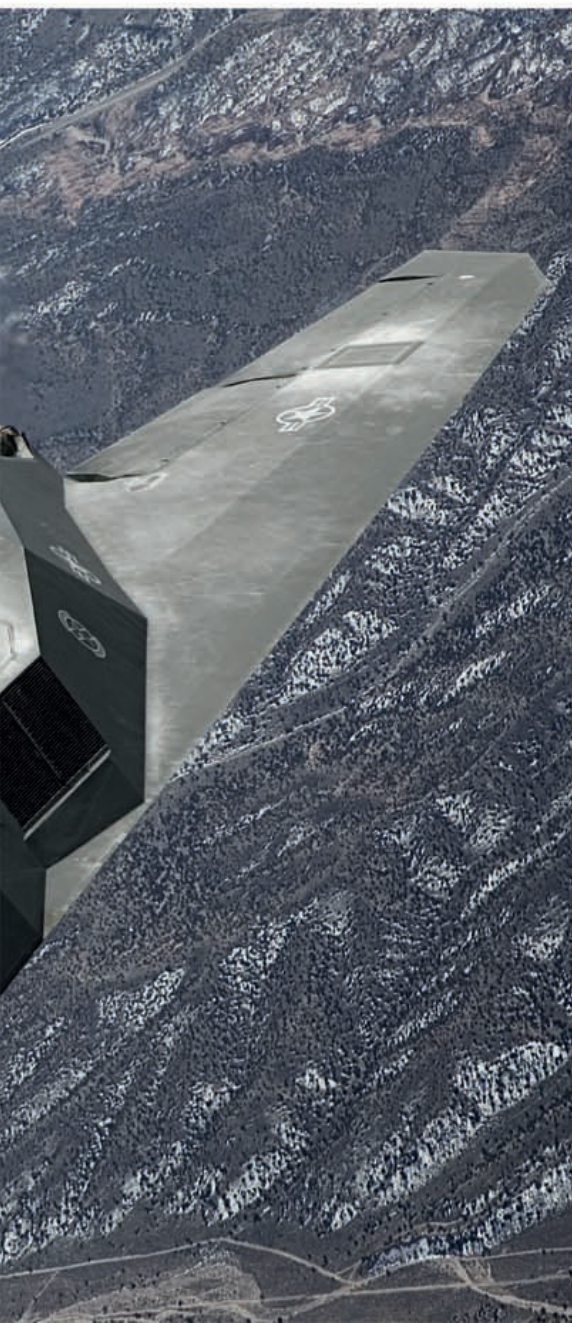
The F-117 "borrowed" parts from other existing planes: the front undercarriage, for example, was taken from the Lockheed A-10 Thunderbolt.

**▲ V-SHAPED TAIL**

Sometimes referred to as "ruddervators", the two forks of the tail combined the functions of rudders and elevators.

**▲ INTAKE GRILLES**

Fine-mesh grilles over the engine air intakes prevented radar from reflecting off the compressor blades.

**INSIDE THE COCKPIT****▲ HEAD-UP DISPLAY**

Located on top of the instrument decking, the head-up display (HUD) projected key information onto the pilot's forward view through the windscreen.

**▲ INSTRUMENT DECKING**

The F-117's cockpit included a central screen for infrared imagery, twin multi-function colour displays for flight and weapons data, and a digital moving-map system.