




3 Iron the sole interfacings to the wrong side of the main fabric sole pieces, making sure they are centred.



4 Place the main fabric and lining fabric fronts right side to right side and pin them together. Stitch the top edge only, leaving a 5mm ($\frac{1}{4}$ in) seam allowance.

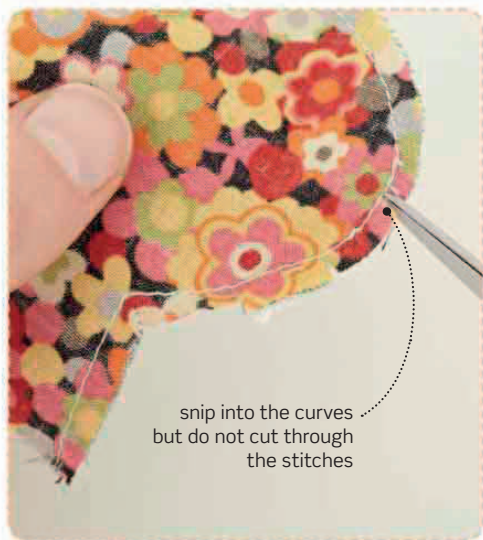

5 Trim the seam allowance to 2.5mm ($\frac{1}{8}$ in) and clip into the corners and curves. Turn the fronts right side out and iron.



6 Place the main fabric and lining fabric backs right side to right side and pin them together. Stitch around the top edges and sides leaving a 5mm ($\frac{1}{4}$ in) seam allowance. Trim the seam allowance to 2.5mm ($\frac{1}{8}$ in) and clip the curves. Turn to the right side and iron.

