




**9** Place the white cotton on your work surface and top it with the wadding. Top that with the cushion front, right side up. Place one of the back flaps on top, right side down, aligning its unhemmed edge with the bottom edge of the cushion. Place the other back flap on top, right side down, aligning its unhemmed edge with the top edge of the cushion. The back flaps will overlap. Pin the layers of fabric together around all four sides of the cushion, aligning the edges.



**10** Machine along the four sides of the cushion cover using a 1cm ( $\frac{1}{2}$ in) seam allowance. Snip diagonally across the four corners to remove the excess fabric, taking care not to cut through the stitches. Turn the cushion cover right side out and iron if needed. Insert the cushion pad through the back.

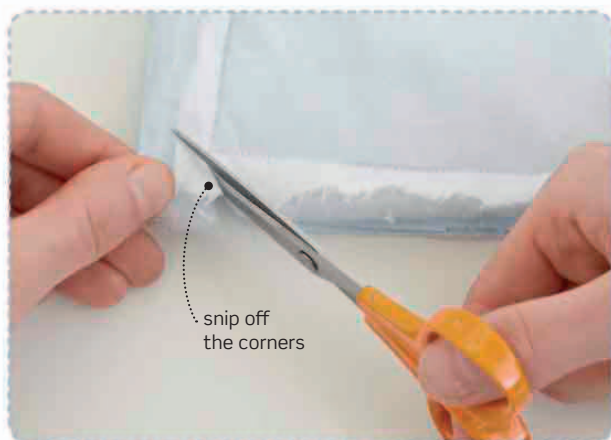