





4 Place the interfaced brim pieces right side to right side and stitch around the edge, leaving a 1cm ($\frac{1}{2}$ in) seam allowance. Trim and clip the curves, then turn to the right side and iron.

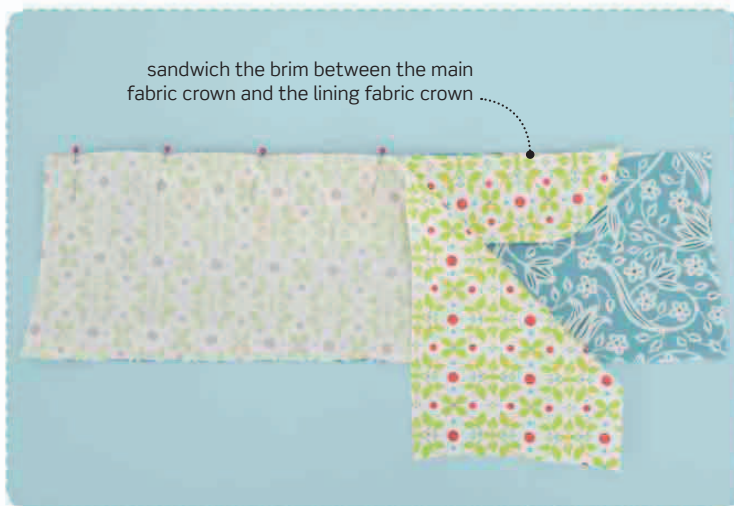

5 Place the brim on the edge of the main fabric crown, right side to right side and matching the centres. Put the lining fabric crown on top, matching the front edges and sandwiching the brim in between. Stitch along the edge, through all the layers, then turn through to the right side and iron.

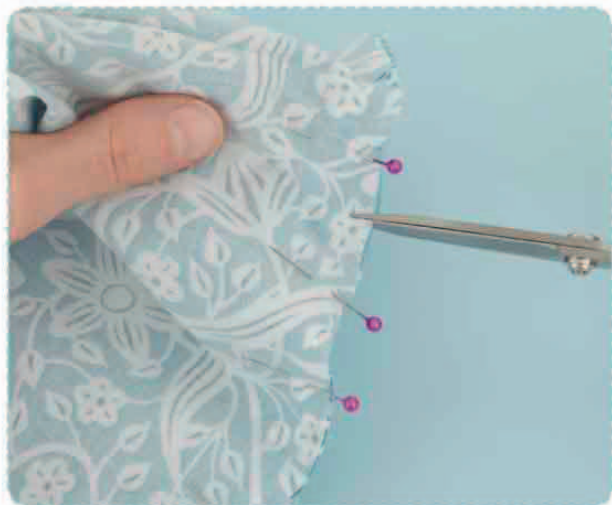

6 Matching the markings on the pattern, pin the main fabric back to the free edge of the main fabric crown, right side to right side. Make 5mm ($\frac{1}{8}$ in) snips along the curved edge.



7 Sew along the pinned curved edge leaving a 1cm ($\frac{1}{2}$ in) seam allowance. Iron the seam towards the centre of the bonnet. Repeat steps 6 and 7 to join the lining back to the lining crown. Turn the bonnet right side out.

