




- 3 Set the sewing machine** to a wide zigzag stitch with a normal stitch length. Place the plain fabric pieces right side to right side and, using a ballpoint needle, sew around the curve, 1cm (½in) from the edge. Trim the seam allowance to 5mm (¼in) and snip into the curve without cutting through the stitches. Or, use pinking shears to trim the seam allowance.



- 4 Place the patterned fabric pieces** right side to right side and zigzag stitch around the curve, leaving a 1cm (½in) seam allowance. Trim and clip into the seam allowance as in step 3. Turn to the right side.

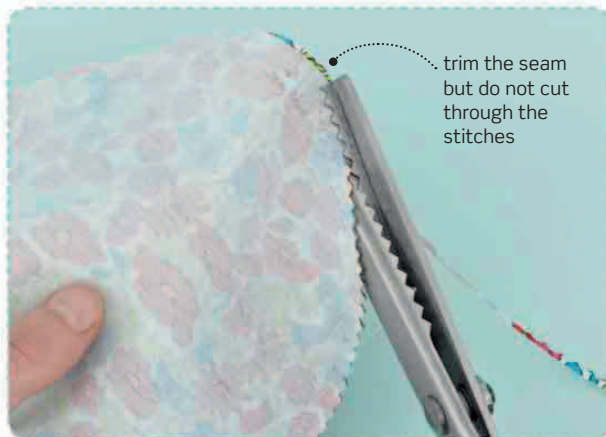

- 5 Insert the plain fabric cap** into the patterned fabric cap, wrong side to wrong side. Align the seams and make sure the plain fabric cap sits smoothly and evenly inside the patterned fabric cap.



- 6 Using a needle and thread**, sew a few stitches through the curved seams at the top of the cap to join the inner and outer caps together.

