




- 3 Pin the front and back** facing templates to the interfacing and cut them out. Iron the interfacing to its corresponding fabric facing. Make sure the shiny side of the interfacing is against the wrong side of the fabric.



- 4 Make the pocket** by folding the fabric right side to right side along the line indicated on the template. Leaving a 1cm ($\frac{1}{2}$ in) seam allowance, stitch along all sides except the folded side. Leave a 2.5cm (1in) opening at the bottom of the pocket.

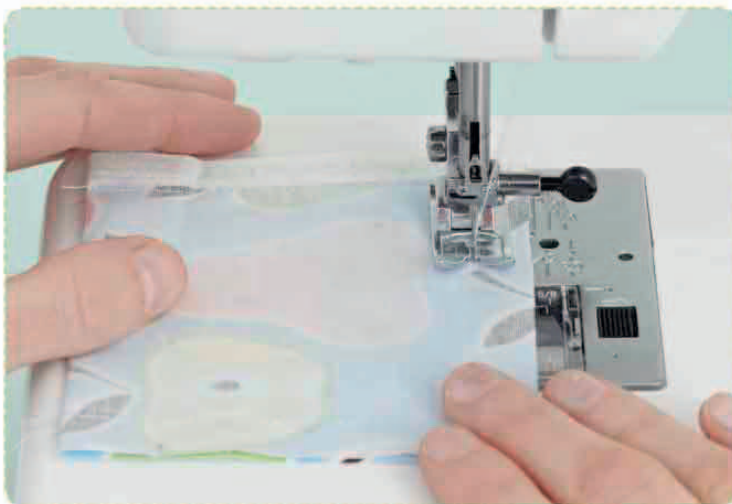

- 5 Turn the pocket** right side out through the opening. Carefully tease out the corners with a pin, then iron flat.



- 6 Pin the pocket in place** on the front of the dress as indicated on the template, with the folded edge of the pocket at the top. Using the sewing machine, topstitch the pocket in place along its sides and along the bottom edge. Leave the top of the pocket open.

