





15 **Pin, then stitch together** the long raw edges of both side/bottom strips, with their wrong sides together.



16 **Pin the front of the bag** to the sewn-up raw edges of the side/bottom strip, right side to right side. Stitch, snipping and pivoting at the corners as in step 12. Trim the seam allowances to 5mm ($\frac{1}{4}$ in), then zigzag them to neaten.

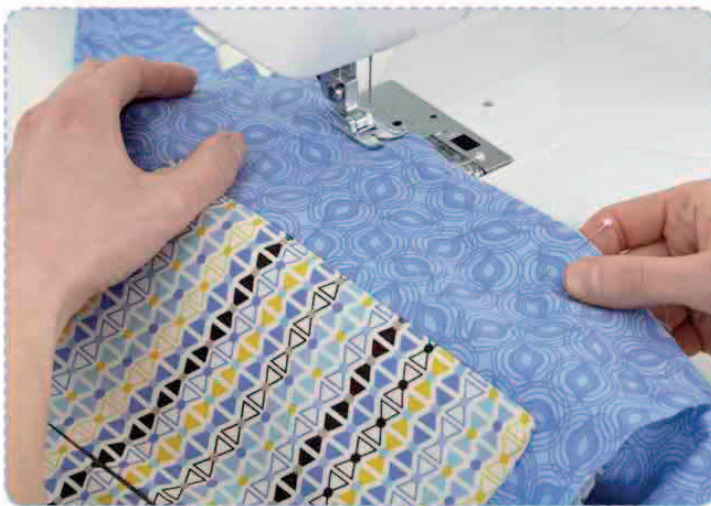

17 **Working on the inside of the bag**, hand-stitch to the strap the turned-down edge that you made in step 14. This will close the hole. Turn the bag to the right side and iron.



Make sure the strap is not twisted before you attach it in step 14.