





turn the
tube right
side out with
a safety pin

3 Attach a safety pin to one end of the strap and push it through the strap. When the safety pin emerges at the other end, pull on it to turn the strap through to the right side (see p.226). Remove the safety pin.

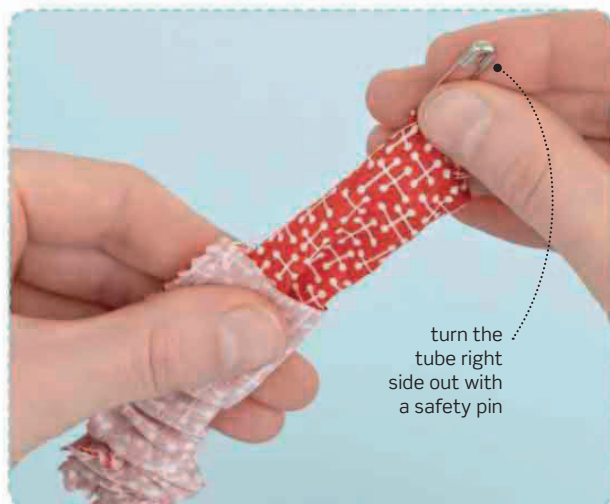


guide the elastic through
the tube with a safety pin

4 Cut a piece of elastic 18cm (7in) long. Attach a safety pin to one end and push it through the strap until the unpinned edge of the elastic lines up with the end of the strap.

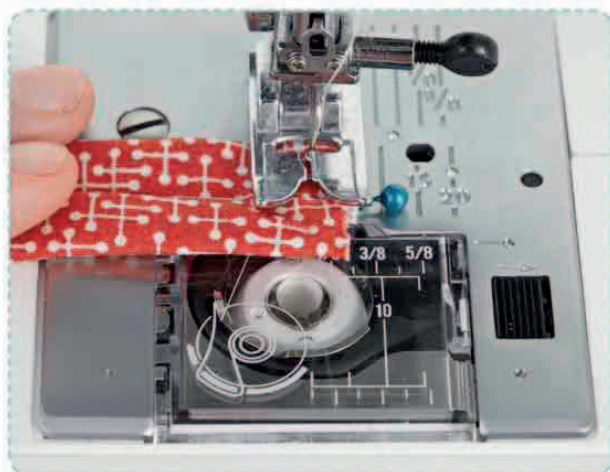

5 Pin the end of the elastic so it is centred on the end of the strap, then machine-stitch it in place, leaving a 5mm ($\frac{1}{4}$ in) seam allowance.

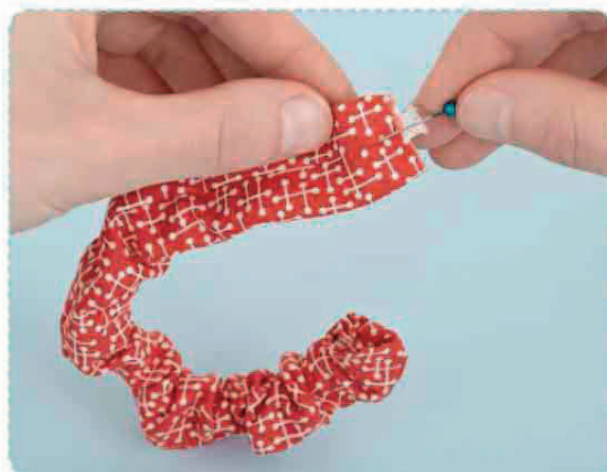

6 Work the safety pin with its elastic through the strap. As you go, the strap will gather along the elastic. When the safety pin emerges at the other end, pin this end of the elastic in place so it is lined up with, and centred on, the edge of the strap. Remove the safety pin and sew the elastic in place as in step 5. Repeat steps 3–6 for the other strap.

