is made up of porcelain material. In the middle of the structure, a U shaped groove is provided. Using metal connectivity on it, more than one circular plates are connected through the screws. If the insulator is broken the conductor does not fall down.

b. Cemented cap type

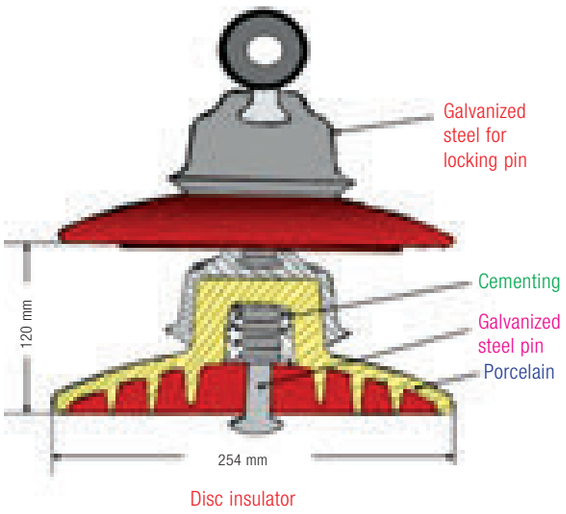


Fig. 1.13 Cemented cap type insulator

Cemented cap type insulator is shown in figure 1.13.This insulator unit is made up of porcelain. The galvanized cast iron cap is cemented to the top. A steel screw is cemented to the cavity at the bottom. The other end of the steel screw is placed in the ball shape to fit into the pit in the back of the iron cap.

c) Core and link type

It is a combination of both the above two types of suspension insulators. It is better than the above two types. In this type, porcelain discs are placed symmetrically. The metallic cylinder is pressed and tied to the fringe circular of porcelain plate. This type of insulators are unaffected by temperature.

iii. Strain type insulators

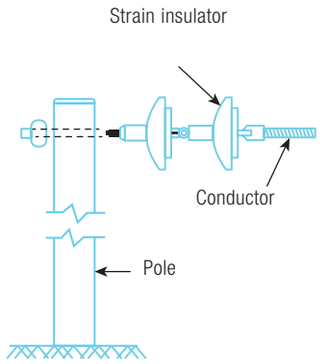


Fig. 1.14 Strain type insulator

Strain type insulator is as shown in figure 1.14. These insulators are used in places where there are very high tensions such as dead ends, sharp curves, corners and line which crosses the river. This type of insulator can be used for low voltages up to 11 KV. For the longer spans across river, two or more strings of insulators are used in series. Two or more strings of insulators are used in parallel where having high tensions.

iv. Shackle insulator

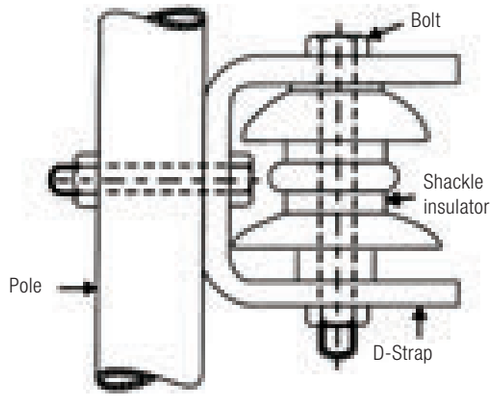


Fig. 1.15 Shackle insulator

A Shackle type insulator is as shown in figure 1.15. This type of insulator mostly used for low voltage distribution lines. Such insulators can either be used in a horizontal position or in a vertical position.

BEE_ENG_Chapter_01.indd 10 12/27/2019 10:17:27 AM