corrosion. Outer container is made of steel coated with paint. In between the inner and outer container a glass wool is used to protect the hot water from the outer atmosphere and moisture. Also, it prevents the hotness from inner container to outer container.

## 2. Water inlet pipe

The inlet pipe is provided to allow the water to go inside the inner container. A valve is fixed to regulate the flow of water into it.

## 3. Water outlet pipe

Outlet pipe is the pipe used for collecting the hot water from the geyser. The outlet pipe is bent on the top, in order to collect hot water uniformly.

## 4. Heating element

Tubular type of heating element is used as a heating element. Nichrome, the mixed alloy, is used as a heating element in all heating appliances.

## 5. Thermostat

Thermostat is a bi-metallic strip used to control the heat and is connected in series with the heating element to get the determined value of heat fixed in the setting position.

## 6. Vent pipe

When we want to shift the geyser or replace the heating element, the water in the geyser is to be removed completely. During that time, this vent pipe is used to drain the water inside the container.

## 7. Pressure release valve

In order to release the pressure inside the geyser from explosion, pressure, release valve is used. Also, it maintains the level of water inside the container.

## 8. Positive plate

The positive rod itself accepts the corrosion produced and preserves the steel container from corrosion.

Geyser is of two types.
They are

i. Non pressure type geyser and
ii. Pressure type geyser

## 3.6.3 Non pressure type geyser

Non pressure type geyser is used in places where small quantity of hot water is required.

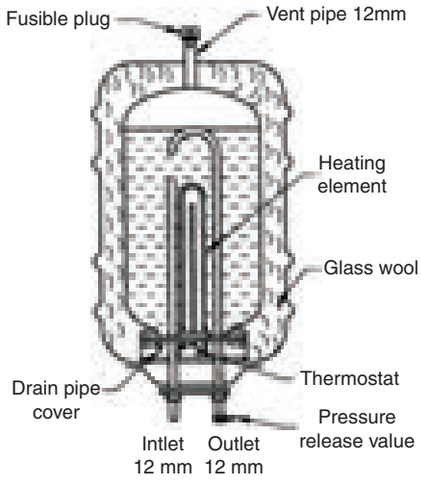



**Fig. 3.9 Non pressure type geyser**

## Working principle

When an electric supply is given to the geyser, the electrical energy makes the heating element gets heated gradually. The conversion of electrical energy into heat energy is due to nichrome, which is having a very high resistance value. Now the heat conducts water and makes it hot. The setting position of thermostat automatically stops the electrical input in the appliance. After the heat gets reduced,



BEE_ENG_Chapter_03.indd 48 12/27/2019 10:24:53 AM