the thermostat immediately connects with electric supply and makes the water again to get heated. The density of hot water is lesser than cold water. Hence the hot water is on the top and cold water in the bottom of the geyser.

3.6.4 Pressure type geyser

For requirement of large quantity of hot water, in a multi-storied building, pressure type of geyser is used. It is shown in figure 3.10. The water in the appliance is controlled by float valve.

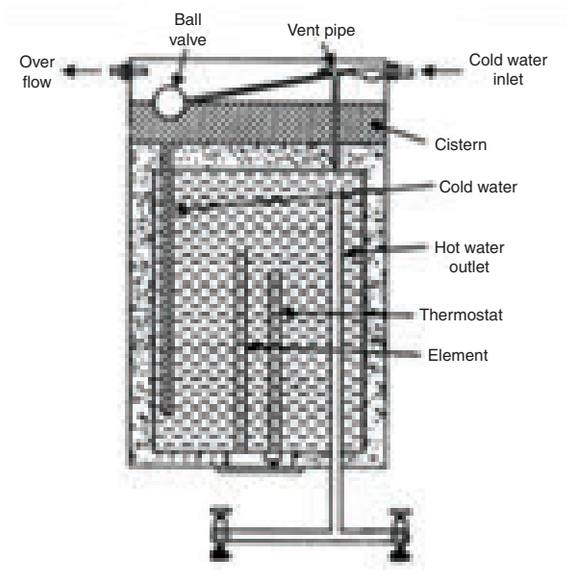


Fig. 3.10 Pressure type geyser

Working principle

The working principle of this type is similar to that of non-pressure type geyser. In this water pressure is controlled by a floating valve. Being the outlet pressure is high, this type of geyser is used in multi-storied building for getting hot water. This type of geyser is fixed in one place and hot water can be collected in various rooms.

3.6.5 Defects, reasons and remedies of electric geyser

Sl. No.	Defects	Reasons	Remedies
1	Supply is given. But the geyser is not functioning	There may be open circuit in conductor, plug or power chord.	The power chord and plug should be properly connected.
2	Fuse gets melted when the supply is put 'ON'.	Short circuit between the terminals.	Phase and neutral wire should be properly insulated.
3	Gets electric shock while touching it.	Supply wire may contact with metal parts of the appliance.	The contact terminal part should be properly insulated.

BEE_ENG_Chapter_03.indd 49 12/27/2019 10:24:53 AM