
The speed of the washing cylindrical container is proportional to the rotating speed of the mounting vessel. The clothes were washed in the method of wave up mode.

b) Working principle

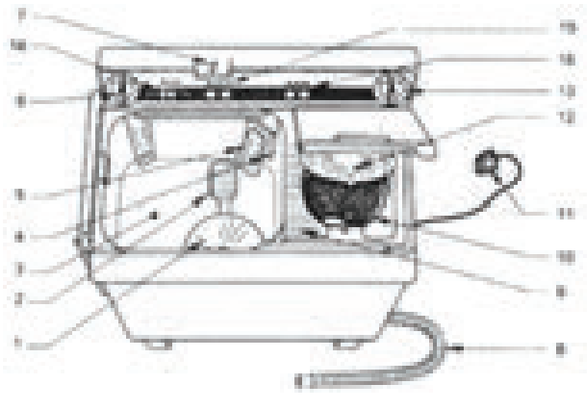

1. Agitator
2. Water filter
3. Washing cylinder
4. Water level selector
5. Cotton filter
6. Washing time control
7. Water inlet pipe
8. Vent pipe
9. Purifier
10. Rotating cylinder
11. Three pin plug
12. Squeezing cylinder lid
13. Squeezing time control
14. Agitator terminal junction
15. Water control tap
16. Water controling knob

Fig. 4.19 Internal contruction

After putting the dirty clothes inside the washing machine, soap powder is put into it, proportionate to the clothes to be washed, and water inlet tape is allowed to flow the water inside the container. The agitator rotates right and left and the dirts in the clothes are removed. Then the dirty water is removed through the outlet spout pipe. After the dirty water fully went out, the fresh water re enters and rinses the washed clothes to make clean. The drier then squeezes the water in the washed clothes and make dry. This type of appliance is said to be as semi-automatic washing machine as shown in figure 4.19. In this, the motor rotates and rinses the clothes with water and makes clean.

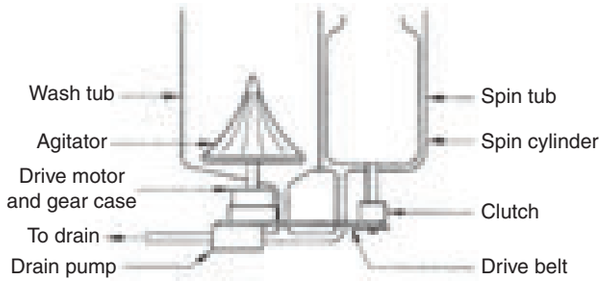


Fig. 4.20 Construciton diagram

4.3.2 Automatic washing machine

The automatic washing machine is of two types.

1. Top load (open) washing machine.
2. Front load (open) washing machine.

a) Top load washing machine

Construction

In this type, washing machine, contains a single drum which is used for both washing and drying the clothes. A capacitor start induction motor is used in this washing machine. Water inlet and outlet pipes are connected for the water flow to go in and out.

Working principle

The machine itself supplies the required quantity of soap powder according to the quantity of clothes put inside the drum. Since this washing machine is automatic type, after the supply is 'on', the water incoming and outgoing from the tap is done automatically by washing machine including the timings required for washing and drying with the help of timer switch. The motor is operated by a time control device and it automatically divides all the works. This technique is called neuro muscular technology and

BEE_ENG_Chapter_04.indd 61 12/27/2019 10:27:22 AM