(a) IRC Recommendations for Road Camber

Sl. No.	Type of surface	Areas with greater than 100cm annual rainfall	Areas with less than 100cm annual rainfall
1	Earth, gravel, stabilised soil	1 in 16	1 in 24
2	Water bound macadam	1 in 36	1 in 46
3	Bituminous surfacing	1 in 60	1 in 60
4	Cement Concrete roads	1 in 72	1 in 72

(b) Types of Camber


1.	**Sloped camber:**	i)	Straight camber	ii)	Multiple camber		
2.	**Curved Camber:**	i)	Barrel camber	ii)	Parabolic camber	iii)	Elliptical camber
3.	**Composite camber**						

(c) Uses of Camber

1. Provides surface drainage of rainwater.
2. Prevents the entry of water or moisture into the subgrade soil thereby increasing the durability of the road.
3. Easy separation of up and down traffic.

ii. Super Elevation

On horizontal curves, there is a tendency for the vehicles to fall away from the outer portion of the curve due to the existence of centrifugal force. To overcome this effect, the outer edge of the road is raised with respect to the inner edge. It is called as **super elevation**.

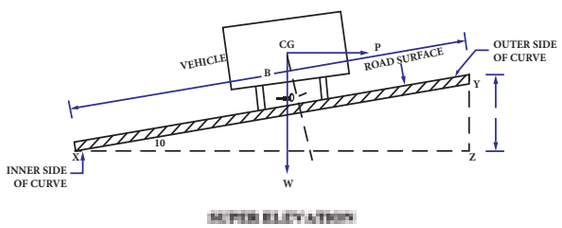

(a) Advantages of Super elevation

i. It increases the stability of fast-moving vehicles on horizontal curves.

ii. It counteracts the effect of centrifugal force.

iii. On super elevated curves, the vehicles need not be slowed down.

iv. The water can be drained off easily, therefore there is no possibility of formation of pot holes on the outer edge.

v. It minimises the danger of skidding or toppling of fast-moving vehicles.

iii. Sight Distance

It is the distance along the centre line of the road over which a driver can see the opposite vehicle on the road surface in order to avoid accident.

This distance should be such that the drivers and pedestrians are given sufficient time to react and not only to

U6.indd 116 1/10/2020 1:35:01 PM