
Types of ranging

Ranging is of two types namely,

1. Direct ranging
2. Indirect ranging

1. Direct ranging:


When the intermediate ranging rods are placed in line by direct observation then it is called Direct ranging. It is possible only when the end stations are mutually intervisible.

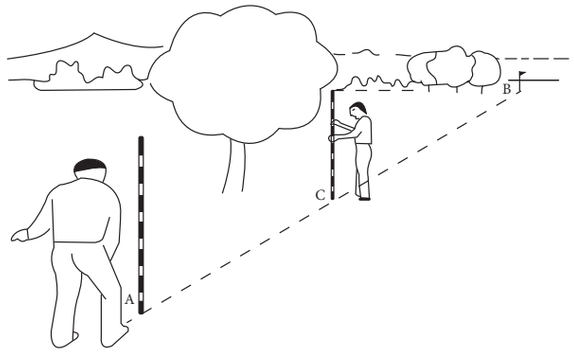

Direct ranging

2. Indirect ranging

When the end stations of survey line are not mutually intervisible then it is called indirect ranging. It may be due to an intervening hill or a valley or an obstacle such as tall building or a thick wooded forest, etc. It is also called as Reciporcal ranging.

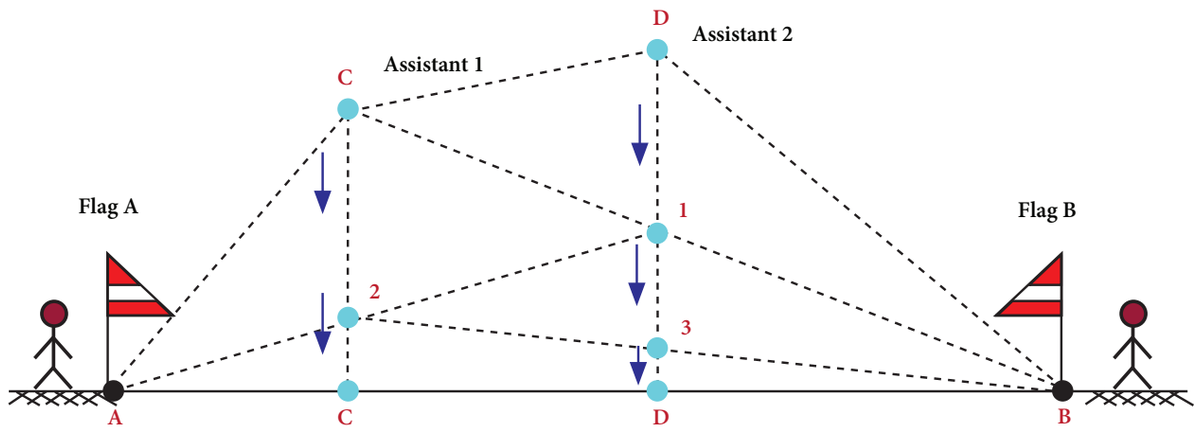


Reciprocal ranging

Microwave Instruments - Distance measurer



These instruments make use of high frequency radio waves. These instruments were invented as early as 1950 in South Africa by Dr. T. L. Wadley. The range of these instruments is up to 100 km and can be used both during day and night. It is used in surveying to measure the distances. E.g. Tellurometer



U3.indd 42 12/11/2019 5:22:12 PM