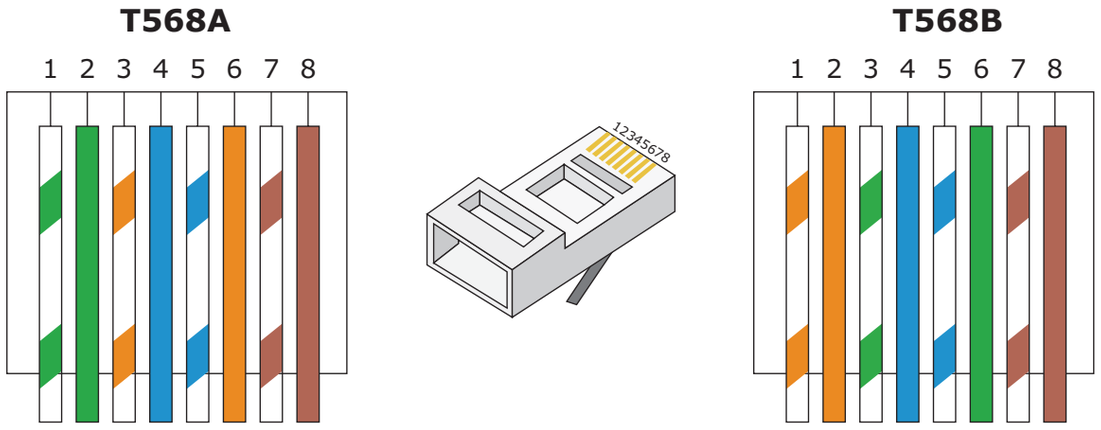


Figure 13.10 The Ethernet wiring schemes (T568A & T568B)

which is Receiver of data. See Figure 13.10 & Figure 13.11

1. In the Figure 13.10 the position of pin no. 1 describes the transmit data or bidirectional, the bidirectional means it can be sent to both connection with the TX (positive). The TX+ has positive terminal and the color is used in this position is white green.
2. In the position of pin no. 2 describes the transmit data or bidirectional with the TX (negative). The TX- has negative terminal and the color is used in this position is Green.
3. In the position of pin no.3 describes the receive data or bidirectional with the RX (positive). The RX is compatible to receive the data which has positive terminal and the color is used in this position is white orange.
4. In this position of pin no. 4 describes that it is not connected or bidirectional. It means there will be no transmitting or receiving will exist. But it can be used later for some other connection. The color used in this pin is blue.

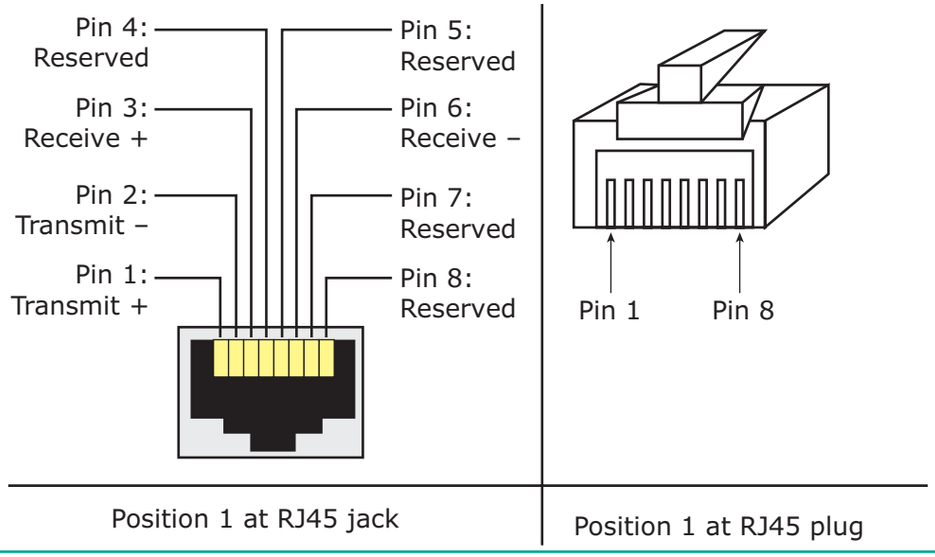


Figure 13.11 The Ethernet port pin details

XII CompApp_English version CHAPTER 13.indd 183 23-02-2020 13:00:29