
are again presented to the work. The common types of wheel dressers known as 'star'-dressers or diamond tool dressers are used for this purpose.

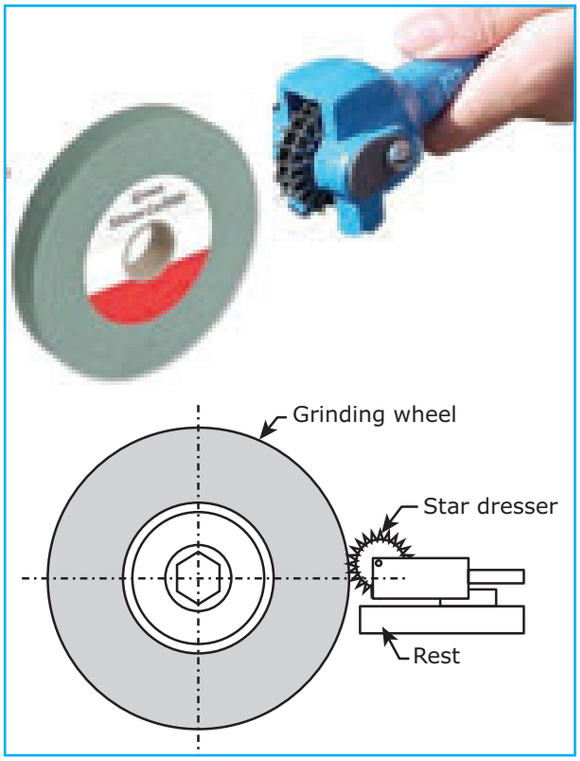


Dressing grinding wheel

Star dresser consists of a number of hardened steel wheels on its periphery. The dresser is held against the face of the revolving wheel and moved across the face to dress the wheel surface. This type of dresser is used particularly for coarse and rough grinding wheels.

For precision and high finish grinding, small industrial diamonds known as 'bort' are used. The diamonds are mounted in a holder. The diamond should be kept pointed down at an angle of 15^0 and good amount of coolant is applied while dressing very light cuts may be take with diamond tools.

Truing

The grinding wheel becomes worn from its original shape because of breaking away of the abrasive and bond. Sometimes the shape of the wheel is required to be changed for form grinding. For these purpose the shape of the wheel is corrected by means of diamond tool dressers. This is known as truing of grinding wheels.

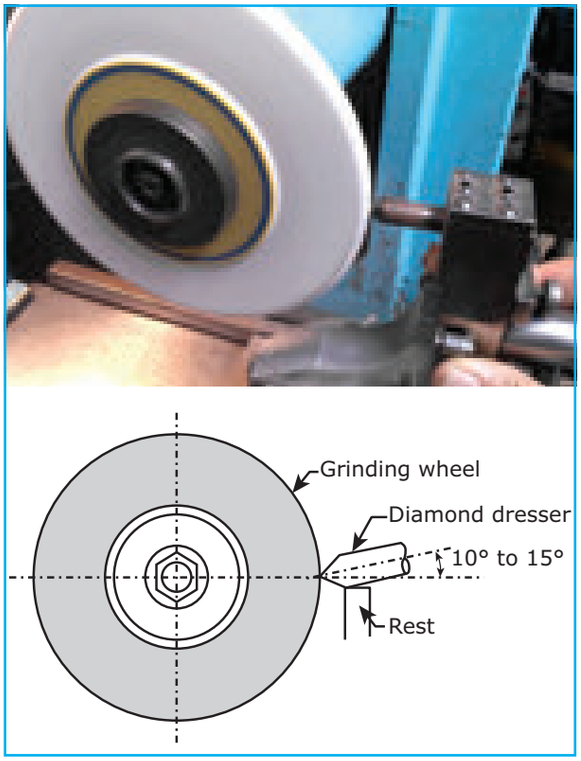

Truing

In first, the diamond dresser is mounted on a work rest upon the work table. Diamond tool dressers are set on the wheels at 15^0 and moved across with a feed rate must not exceeds 0.02 mm. A good amount of coolant is applied during truing of grinding wheels.

4.14 Balancing of grinding wheels

The weight and density of the grinding wheel should be evenly distributed throughout the body of the wheel is known as balancing. Otherwise the wheel will rotate without balance. Wheel balancing is to be made by dressing and

XII BME_English version CHAPTER 04.indd 92 1/8/2020 1:43:08 PM