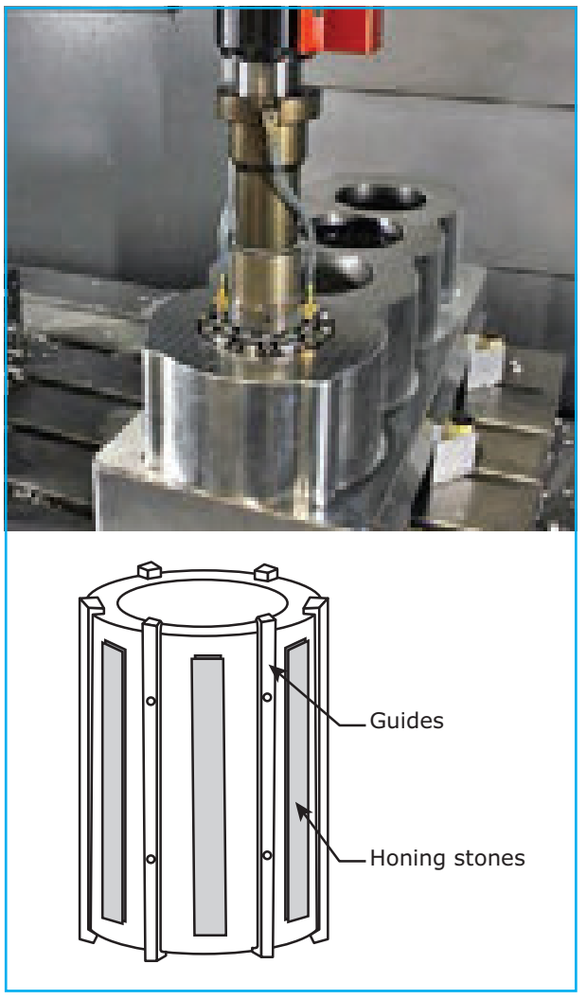


Honing

Honing can be done on materials like plastic, silver, brass, aluminium, cast iron, steel and cemented carbide. Journal bearings supporting the crank shafts and long holes found in the barrels of guns are generally honed. There are two types of honing machines namely vertical and horizontal.

Superfinishing

The process of superfinishing is an operation intended to produce an extremely high quality of surface finish. The surface roughness valve can be maintained between 0.015 and 0.32 microns. A very thin layer of metal (0.005 mm to 0.002 mm) is removed by using very fine size of abrasives (size of 400 to 600) in super finishing. It can be done on both external and internal surfaces.

The grinding stones are made to reciprocate and the work piece is made to rotate or reciprocate. A fine surface is obtained by admitting coolant mixed with kerosene. Using some special machines, super finishing is performed on crank shaft, journal bearings and cam shafts.

Polishing

Polishing is a surface finishing operation performed by a polishing wheel for the purpose of removing metal to take out scratches tool marks and other defects from rough surfaces. Polishing is performed only to provide better looks. Polishing wheels are made of leather, paper, canvas, felt or wool. The abrasive grains are setup sometimes on the faces of the wheel and work is held against it and rotated to give the desired finish.



Polishing

Buffing

Buffing is used to give a much higher, reflective finish that cannot be obtained by polishing. Buffing wheels are made of felt pressed and glued layers of a variety of cloth. The abrasive may consist of iron oxide, chromium oxide, emery, etc. The abrasive is mixed with a binder. The binder is a paste consisting of wax

XII BME_English version CHAPTER 04.indd 95 1/8/2020 1:43:08 PM