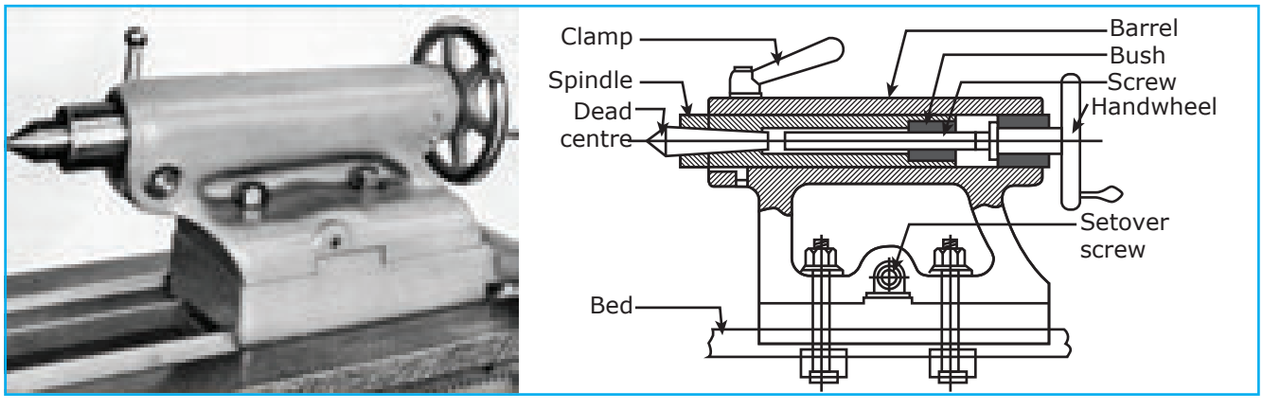


Tailstock


To remove the dead centre or any other tool from the spindle, the handwheel is rotated in anticlockwise direction further. The movement of the spindle may be locked by spindle clamp, located on top of the tailstock. To hold different lengths of work, the tailstock can be adjusted and locked at desired position on the lathe bed. The casting of the tailstock body is divided into two. The lower casting of the body can be clamped to the bed. The upper casting can be moved sidewards from lathe axis.

Uses of Tailstock

1. It supports the right end of the long workpiece when it is machined between centres.
2. It is useful in holding tools like drills, reamers and taps when performing drilling, reaming and tapping.
3. The upper casting of the body is set off by a small distance from the axis of the lathe to turn tapers on the work pieces.
4. It is useful in setting the cutting tool at correct height aligning the cutting edge with lathe axis.

Carriage

Carriage is located between the headstock and tailstock on the lathe bed guideways. It can be moved along the bed either towards or away from the headstock. It has several parts to support, move and control the cutting tool.

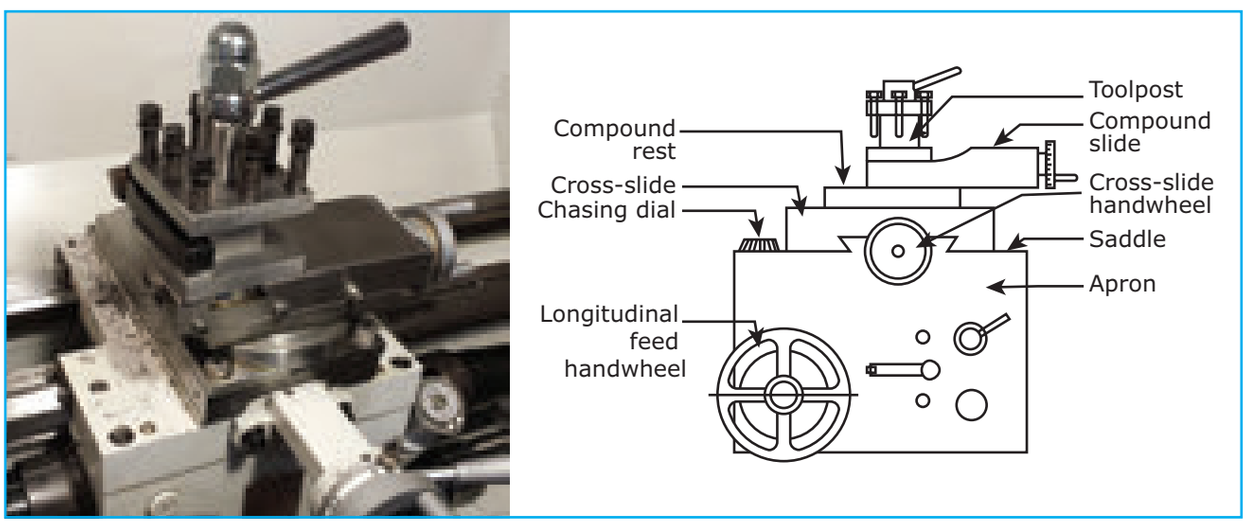

3D- View of Carriage

Carriage

XII BME_English version CHAPTER 01.indd 5 1/8/2020 1:45:51 PM