
of magnetic material only are held in this chuck. Very small, thin and light works which cannot be held in an ordinary chuck are held in this chuck.

Face plate


Face plate is used to hold large, heavy and irregular shaped workpieces which cannot be conveniently held between centres. It is circular disc bored out and threaded to fit to the nose of the lathe spindle. It is provided with radial plain and 'T' – slots for holding the work by bolts and clamps.

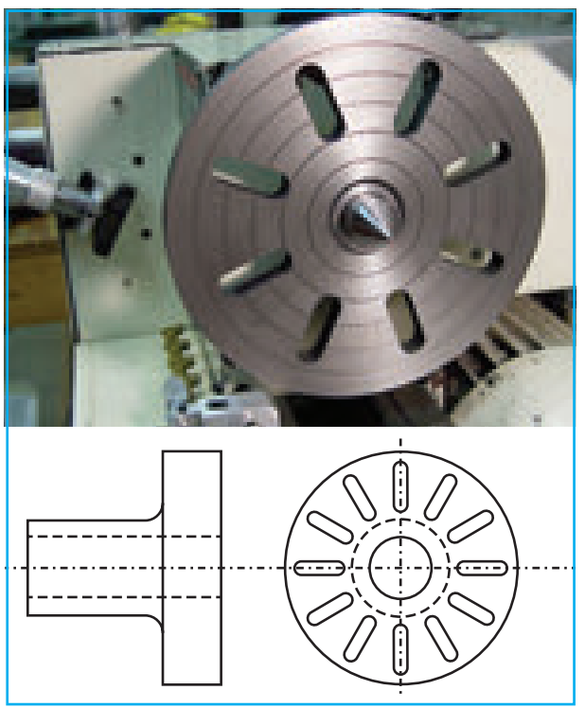

Face plate

Driving plate


The driving plate is used to drive a workpiece when it is held between centres. It is a circular disc screwed to the nose of the lathe spindle. It is provided with small bolts or pins on its face. Work pieces fitted inside straight tail carriers are held and rotated by driving plates.

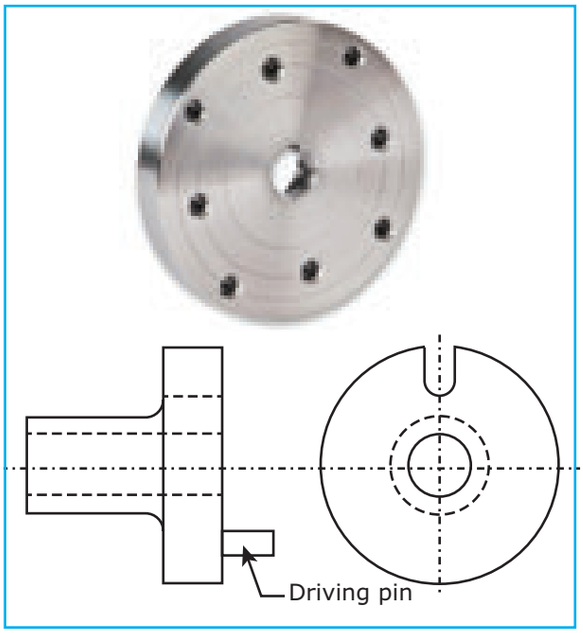

Driving plate

Catch plate

When a workpiece is held between centres, the catch plate is used to drive it. It is a circular disc bored and threaded at the centre. Catch plates are designed with 'U'-slots or elliptical slots to receive the bent tail of the carrier. Positive drive between the lathe spindle and the workpiece is affected when the workpiece fitted with the carrier fits into the slot of the catch plate.

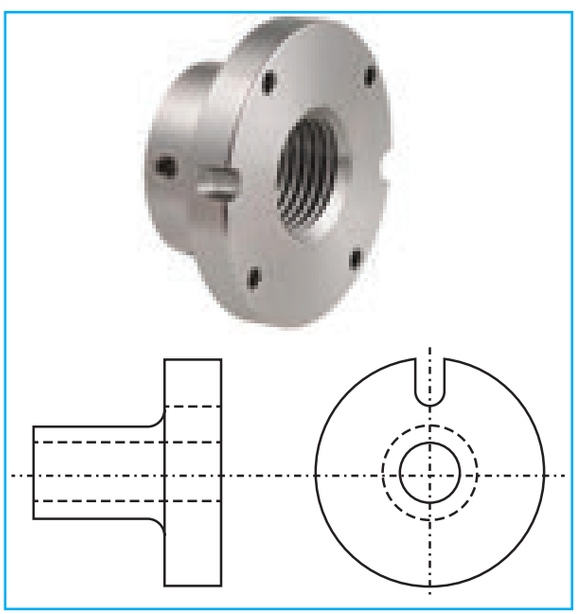

Catch plate

XII BME_English version CHAPTER 01.indd 18 1/8/2020 1:45:54 PM