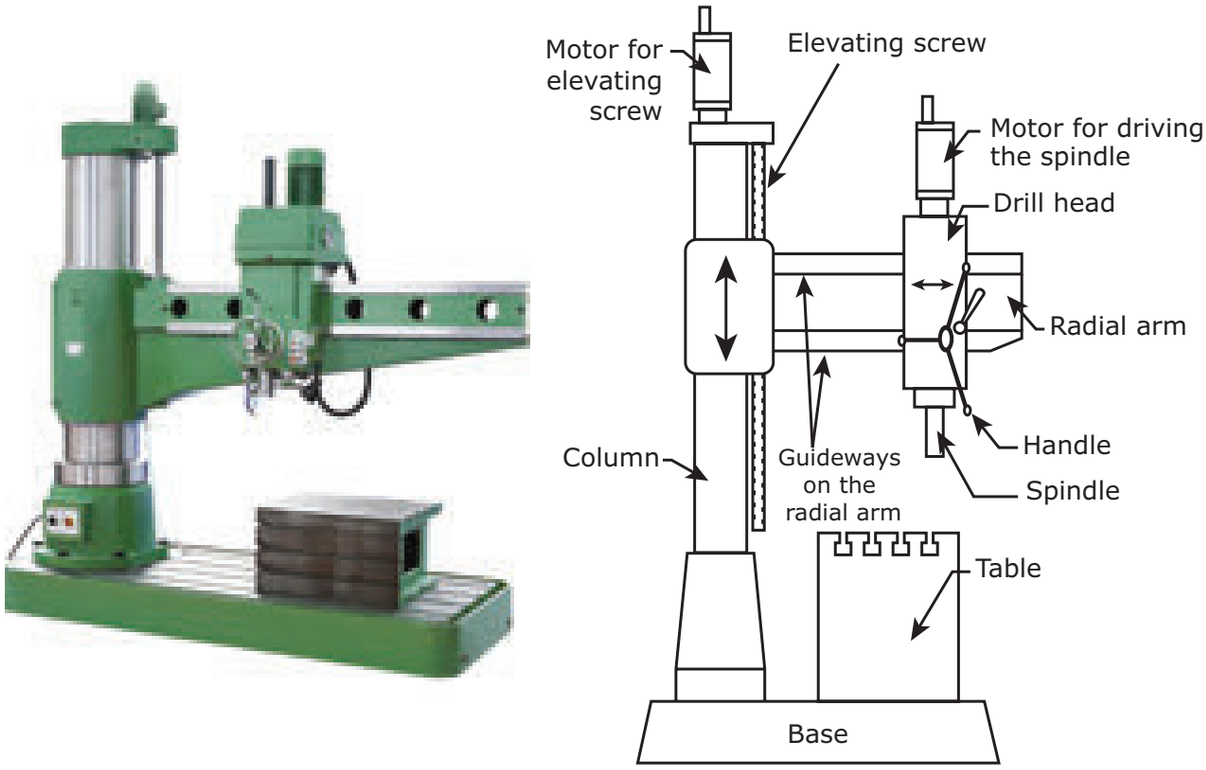


Radial Drilling Machine

electric motor is mounted on the top of the column for rotating the elevating screw.

Radial arm

The radial arm is mounted on the column parallel to the base and can be adjusted vertically. The vertical front surface is accurately machined to provide guide ways for the drill head. The drill head can be adjusted along these guide ways according to the location of the work. The arm may be swing at 360° around the column. It can also be moved up and down according to the different heights of the work pieces.

Drill head

The drill head is mounted on the radial arm and houses all mechanism for driving the drill at different speeds and feed.

A motor is mounted on the top of the drill head for this purpose. To adjust the position of drill spindle with respect to the work, the drill head may be made to slide on the guide ways of the arm. The drill head can be clamped in position after the spindle is properly adjusted.

Special Features

- To drill holes at different places of the work pieces without any movement of the work.
- To drill inclined holes on the work piece with the help of tilting the drill head at an angle.
- To make internal threads in a hole by using tapping attachments.



The inventor of Radial drilling machine is Geoffry Reeves of Australlia, year 1890.

XII BME_English version CHAPTER 02.indd 37 1/8/2020 1:44:51 PM