
fabric and stitching it and pulling the threads to draw the fabric to resist the dye from penetrating into the fabric called as **Tritik**. Tie and dye fabrics are quiet popular in apparel and home furnishing.




Tie and dye


ii. **Batik:** A resist method developed by the Japanese involves wax as the resist substance. A copper cup called "tjanting" is attached to a reed handle. The wax is taken in this tjanting and applied in the design areas, wherever necessary to resist the dye. The fabric is immersed in dye solution. The wax resists the dye from entering the fabric.

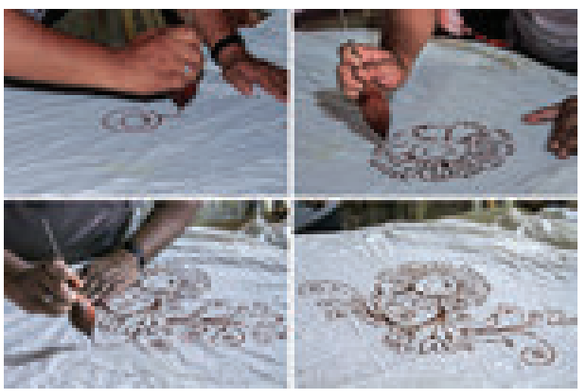

Batik

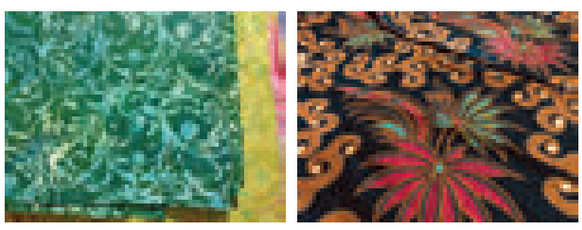

In some places it forms cracks and forms fine lines in the design. The fabric is later washed in boiling water to remove the wax.

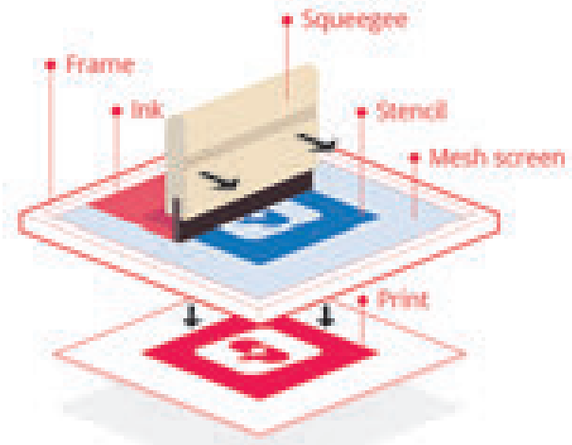



Screen printing

iii. **Screen printing:** A Screen is made by covering a frame with blotting cloth of silk, metal or nylon filament yarns. The fabric is covered with a film and the design areas are cut out of the film. Some areas of the mesh are left open to allow the dyestuff to pass through and print the fabric. The frame is laid on the fabric, and the dye is placed at one end of the frame. A rubber knife moves the dye across the screen and forces the dye through the open mesh of the fabric. One screen is prepared for each colour. Screen printing is considered by many textile authorities to be the newest method of decorating fabrics.

XII Std - Home Science EM_Unit 4.indd 112 20-04-2020 6.44.23 PM