iv. **Discharge printing:** Discharge printing is used to print designs on fabrics which has been previously dyed. A reducing bleach is used which removes the base dye and leaves a white pattern on a coloured ground. Dark fabrics with white designs such as polka dots are examples of discharge printing.



Discharge printing

v. **Stencil printing:** Stencil Printing was developed by the Japanese. Designs are cut in stencil paper which is coated with wax. The stencil designs are placed on fabric and colour is applied by sponge, air brush or by spray gun. This method is done on minimum fabrics like scarves and similar products.




Stencil Printing

4.8.2. Direct Printing

Direct Printing is the method of applying colour directly on to the fabrics by one of the following methods.

i. **Roller Printing:** Designs are engraved in metal rolls and arranged around a main cylinder and locked into place. Many rolls can be used. A trough containing in the dye solution along with a doctor blade which scrapes of the excess dye is placed for each roll. The large cylinder is covered by a padded blanket and a grey cloth is used on top of the printing blanket. The cloth to be printed is on the outer surface. The layers move together, the rolls take up the dye from the trough, print on the cloth as it comes and goes to the drying oven which sets the colour on the fabric. Roller printing has steadily increased during the past decades for its quality prints and unusual patterns produced.

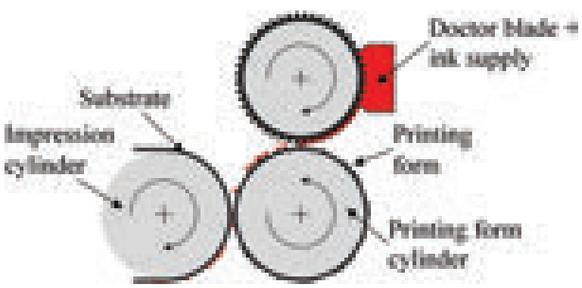

Roller Printing



XII Std - Home Science EM_Unit 4.indd 113 20-04-2020 6.44.25 PM