is changed from solid state on the paper to vapor and again changes to solid and fixes on the fabric. The heat sets the colour on the fabric. Transfer printing is suitable for nylon and some acrylic fabrics.



Transfer Printing

ACTIVITY 6

Decorate a plain woven white fabric by each of any three methods of printing or dyeing with household dyes.

4.9 Basic Stitches

Basic Stitches are the fundamental stitches which have to be learnt before doing actual sewing. It is necessary to learn basic stitches to do temporary and permanent stitching.


4.9.1 Temporary Stitches

Tacking or basting is a temporary stitch used for holding two or more layers of fabric together before a permanent stitch in made. Usually the stitch is worked from right to left, starting with a knot in contrasting colour thread, so that it can be easily removed.

i. **Even Tacking:** Secure the thread with a knot on the wrong side or several firm small stitches at the end of the seam. Make the running stitches ¼ long, where the stitch is the same length on the right and wrong sides. Even Tacking is used where there is strain while stitching bodice seams and also as a guideline for stitching intricate top stitched details.

ii. **Uneven Taking:** In this, the stitches on the upper side is ½ or at least twice that on the underside (¼) . This stitches can be used for longer folds and seams. This is comparatively stronger than even tacking. Use this type tacking as a guideline or where there is little or no strain.

iii. **Diagonal Tacking:** While attaching two or more layer of fabrics this type of stitch is made about ¼" apart before making machine stitch. Work stitches through the material at right angles to the fabric edge so that a diagonal or slanting is made on the upper side and a vertical stitch is made on the underside.

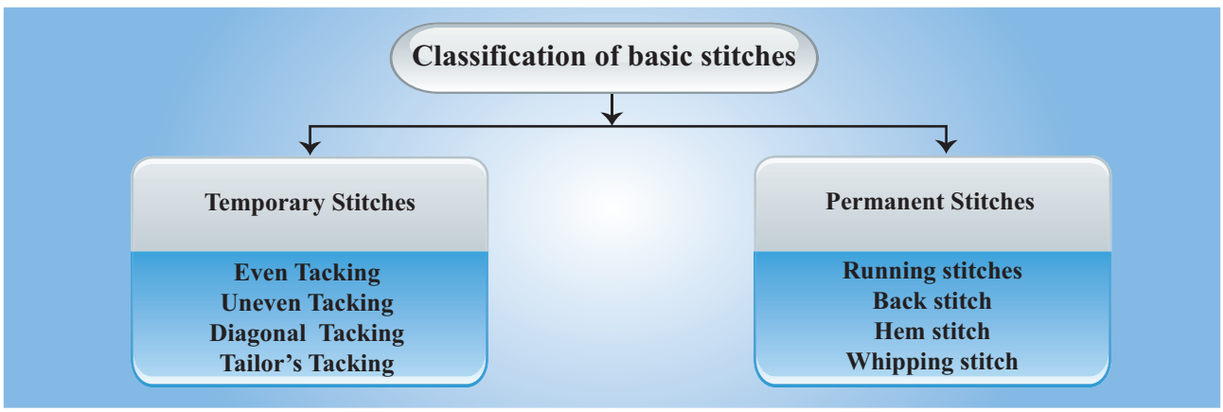

XII Std - Home Science EM_Unit 4.indd 115 20-04-2020 6.44.30 PM