c) Methods of preparation of coffee

Two level measuring table spoons are added to 3 /4th cup of water in making coffee. To prepare weaker brew hot water can be added after the full strength coffee preparation.

i) Filtration

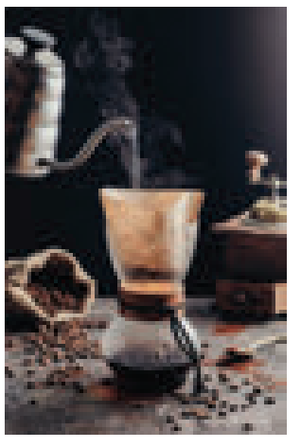


Plate 4.30 **Filtration**

By this method, water filters through the coffee, into a lower compartment of a coffee maker. The drip part consists of an upper compartment which is perforated and a lower compartment which is a receiver for a filtered beverage.

ii) Vacuum Coffee Maker



Plate 4.31 **Vacuum Coffee Maker**

The upper compartment holding coffee has an open tube and is connected to lower compartment. Coffee is usually prevented from passing into the lower compartment using a piece of cloth covered dish placed over the tube opening. Water is placed in the lower compartment and the pot is heated until water raises into the upper compartment. When the pot is removed from the fire, a vacuum is created in a lower bowl drawing a clear infusion down into the bottom bowl.

iii) Percolation



Plate 4.32 **Percolation**

Here the heated water is moved upward through a tube onto the coffee compartment. The ground coffee powder kept in a perforated coffee basket. There is a dome at the lower end of the tube which extends from the top of the percolator, and then the tube supports the basket. Steam generates the pressure on the surface of the water under the dome, forces water up the tube onto the coffee. The percolation time depends upon the speed of circulation which is varied from 8-15 minutes.

FSM_Chapter 04.indd 93 1/13/2020 10:03:07 AM