floats (loose unwoven threads) are seen on the surface that is the back side of the fabric. This is a very typical case of a jacquard fabric.

7.5.2 Knitted Fabric

When the fabric has loopy structure, and is extremely stretchy they are made by means of knitting. The looped structured of the knitting creates a very good drape like that of socks and warm feeling like the innerwear and sweater. The sample can be termed as knitted, when the closer view of the material reveals loop like structures. Examples are baniyan, panty, slip, sweater and jerkin.

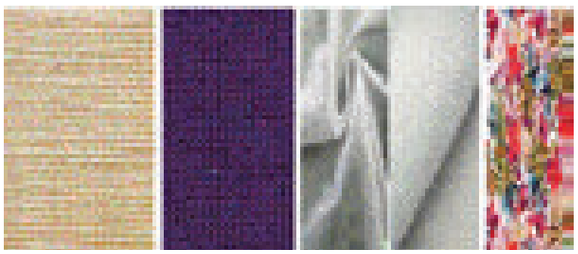


Figure 7.3 Woven, Knitted, Non-Woven and Printed Fabric

7.6 Non-Woven Fabric

A non-woven fabric is made by using heat and resin on short fibres, thereby creating a structure for the short fibres. They are materials that do not have a fibre network by randomly laid technique. One cannot see the warp and weft threads laced or looped like a weaving or knitting.

In order to check if the sample is a non-woven material, the sample can be given pressure and it can be observed that it can tear like a paper. For example, we can think of the tissue paper given in hotel or the sanitary napkins centre part. On scratching the surface of the fabric, the short fibres, will tend to come away with the fingers. This behavior can be observed on a felted craft paper and bindi that is kept by women. By conducting such small tests, we can identify the non-woven fabric.

7.7 Printed Fabric

Printing is defined as localised dyeing. The identification of right and wrong side of the printed fabric is very essential in order to get the material made into a garment. During construction, the alignment of the print to seam or the pocket area is seen as prime importance. When the prints are not matched in the front panel, the pocket, seams it will give a bad outlook on the wearer. Care should be taken to inverse the fabric and to match the exact print.

7.8 Introduction of Preliminary Stitches

Stitches are row sewing that enable in building the strength of two pieces of fabric the basic stitches and their method of construction is discussed below.

7.8.1 Stay Stitch

This involves giving one row of stitch on a single layer of a fabric that it intended to prevent the fabric from distortion or excessive stretching. It is commonly used on a bias strip where the stitching is done on the extreme end of the strip taken.



Why is Stay Stitching needed?

Stay Stitching is the best way to offer stabilisation and protect your fabric against raveling.



XII TDD_English version CHAPTER 07.indd 103 1/13/2020 3:11:41 PM